


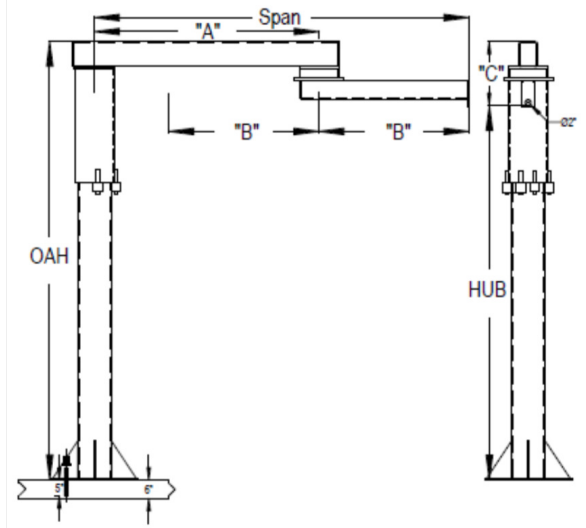

FL-FAR Series Foundationless Floor Mounted Articulating Jib Crane 500 lbs.

Capacity (Pounds)	Model	Hub (ft.)	Span (ft.)	"A" (ft.)	"B" (ft.)	"C" (in.)	OAH	Base Diameter	Unit Weight
500	FL588-FAR	8	8	5	3	19-1/2	9' 7-1/2"	28"	778
500	FL5810-FAR	8	10	6	4	19-1/2	9' 7-1/2"	28"	813
500	FL5812-FAR	8	12	7	5	19-1/2	9' 7-1/2"	28"	967
500	FL5814-FAR	8	14	8	6	20-1/2	9' 8-1/2"	28"	1,256
500	FL5816-FAR	8	16	9	5	20-1/2	9' 8-1/2"	28"	1,306
500	FL5108-FAR	10	8	5	3	19-1/2	11' 7-1/2"	28"	816
500	FL51010-FAR	10	10	6	4	19-1/2	11' 7-1/2"	28"	851
500	FL51012-FAR	10	12	7	5	19-1/2	11' 7-1/2"	28"	1,011
500	FL51014-FAR	10	14	8	6	20-1/2	11' 8-1/2"	28"	1,340
500	FL51016-FAR	10	16	9	5	20-1/2	11' 8-1/2"	28"	1,390
500	FL5128-FAR	12	8	5	3	19-1/2	13' 7-1/2"	28"	854
500	FL51210-FAR	12	10	6	4	19-1/2	13' 7-1/2"	28"	889
500	FL51212-FAR	12	12	7	5	19-1/2	13' 7-1/2"	28"	1,056
500	FL51214-FAR	12	14	8	6	20-1/2	13' 8-1/2"	28"	1,396
500	FL51216-FAR	12	16	9	5	20-1/2	13' 8-1/2"	28"	1,446

Effective 8/2019

NOTE:

- Existing concrete must be a minimum of 6" thick reinforced with a minimum 3,000 psi (5 bag mix), soil pressure must support 2,500 psi.
- Concrete in and around the area (6' x 6') of the base plate must be free of cracks and must appear in good condition.
- All units have 28" diameter base and 24" bolt circle 8 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

Options: Top Entry Electrical Collectors

Epoxy Anchor Kits

Rotation Stops

Bolt Pattern Templates

