

Lifting Beams

Model 25 - Twin Hoist Lifting Beam




PRODUCT FEATURES:

- Use two or more hoists to increase lifting stability.
- Swivel hook with hook latch.
- Several options are available for added versatility.
- Complies with ASME standards.

OPTION D

Roller bearing hook shown (standard on 30 and 40 ton models).

QUICKSHIP PROGRAM

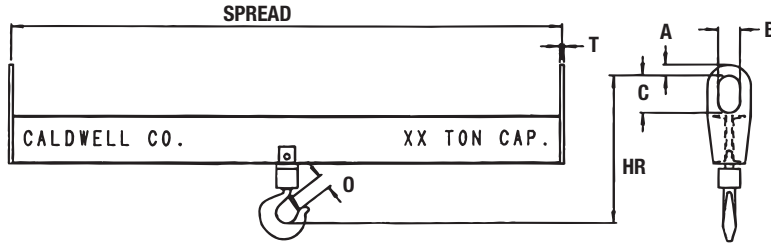

SPECIFICATIONS


Capacity (tons)	Model Number HR Headroom (in.) Weight (lbs.)	Spread (feet)									Other Dimensions (in.)	
		6	8	10	12	14	16	18	20	24		
2	Model Number	25-2-6	25-2-8	25-2-10	25-2-12	25-2-14	25-2-16	25-2-18	25-2-20	25-2-24	A=1-1/2	T=5/8
	HR Headroom	16-3/4	16-3/4	17-3/4	17-3/4	18-3/4	18-3/4	18-3/4	18-3/4	19-3/4	B=3	O=1-1/8
	Weight	125	160	240	280	360	400	530	660	790	C=5	
4	Model Number	25-4-6	25-4-8	25-4-10	25-4-12	25-4-14	25-4-16	25-4-18	25-4-20	25-4-24	A=1-1/2	T=5/8
	HR Headroom	20	21	22	23	23	25	25	25	26	B=3	O=1-1/2
	Weight	160	240	310	410	500	725	805	890	1695	C=5	
6	Model Number	25-6-6	25-6-8	25-6-10	25-6-12	25-6-14	25-6-16	25-6-18	25-6-20	25-6-24	A=1-1/2	T=3/4
	HR Headroom	27-1/2	28-1/2	28-1/2	30-1/2	30-1/2	30-1/2	30-1/2	30-1/2	31-1/2	B=3	O=2-1/16
	Weight	220	300	380	550	640	780	1310	1450	1735	C=5	
10	Model Number	25-10-6	25-10-8	25-10-10	25-10-12	25-10-14	25-10-16	25-10-18	25-10-20	25-10-24	A=2	T=1
	HR Headroom	29	29	32	32	32	32	32	32	33	B=4	O=2-1/4
	Weight	340	420	800	920	1100	1220	1705	1840	2230	C=7	
15	Model Number		25-15-8	25-15-10	25-15-12	25-15-14	25-15-16	25-15-18	25-15-20		A=2	T=1-1/4
	HR Headroom		38-1/4	38-1/4	38-1/4	41-1/4	41-1/2	41-1/2	41-1/2		B=4	O=2-1/4
	Weight		740	865	1050	1930	2158	2290	2500		C=7	
20	Model Number		25-20-8	25-20-10	25-20-12	25-20-14	25-20-16	25-20-18			A=2	T=1-1/4
	HR Headroom		35-1/2	38-1/2	38-1/2	38-1/2	38-1/2	38-1/2			B=4	O=3
	Weight		830	1130	1266	1926	2196	2430			C=7	
30	Model Number		25-30-8	25-30-10	25-30-12						A=2-1/2	T=1-1/2
	HR Headroom		54	54	54						B=5	O=3-3/4
	Weight		1120	1325	1610						C=9	
40	Model Number		25-40-8	25-40-10	25-40-12						A=2-1/2	T=1-1/2
	HR Headroom		58-1/2	58-1/2	58-1/2						B=5	O=4-1/4
	Weight		1165	1470	1700						C=9	

See Model 21 (p. A.21) for Twin Hoist Rotating Beam



OPTION A

Off-set hook for hoists of different capacities.

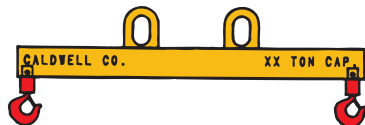

OPTION B

Multiple load hooks, some outside the bail span.



OPTION C

Center bail and extra pair of hooks for maximum versatility.