

SUMNER*

A Southwire Company

Material Lifts



Table of Contents

Specialty Lifts

EL-405 Stacker Lift.....	3
Roust-A-Bout.....	4-5
Fab-Mate.....	6

Material Lifts

Series 1900 Material Lift (8' - 10' / 2.4 - 3 m).....	7
Series 2000 Material Lift (10' - 25' / 2.9 - 7.7 m).....	8
Series 2100 Contractor Lift (12' - 24' / 3.9 - 7.2 m).....	8
Series 2200 Lil' Hoister Lift (9' - 11' / 2.7 - 3.4 m).....	9-11
Series 2300 Drywall/HVAC Lift (11' - 15' / 3.4 m - 4.5 m).....	12-14
Series 2400 Contractor Lift (13' - 17' / 4.0 - 5.2 m).....	15-18
Series 2500 Counter Weight Lift (10 - 25' / 3.0 - 7.7 m).....	9-21
Series 2600 "Axel" The Big Lift (10 - 15' / 3.0 - 4.6 m).....	22-26

Gantries

GH3/4 - GH2T - GH5T.....	27-31
--------------------------	-------

Theatrical Lifts

Eventer Theatrical Lifts.....	32-35
-------------------------------	-------

EL-405 STACKER LIFT

- ✓ 400 lbs (180 kg) lift capacity
- ✓ 53" (135 cm) lifting height
- ✓ Two-speed winch handle
- ✓ Quick action wheel brake
- ✓ Large lifting surface





SPECIALTY LIFTS



Ideal, adjustable work platform for repair shops.



Great for loading customer vehicles.

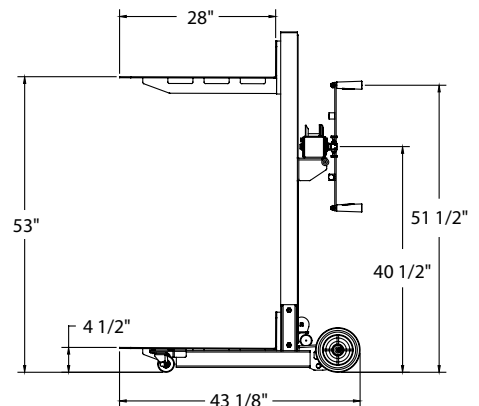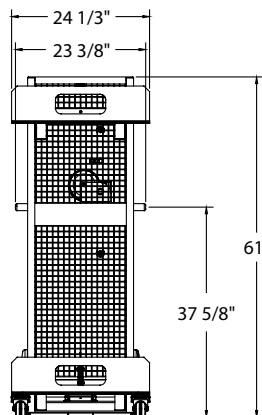

Part #	Description	Max Height		Lifting Capacity		Lift Weight		Shipping Weight	
		Feet	Meter	lbs	kg	lbs	kg	lbs	kg
784650	EL-405 Stacker Lift	4' 5"	1.35	400	180	170	78	182	83

Roust-A-Bout™

SUMNER
A Southwire Company


*The versatile lift that makes
one man a crew!*

- ✓ Lifts 1,500 lb (680 Kg)
- ✓ Moves vertically and horizontally
- ✓ 15, 18 and 25 foot heights
(4.6, 5.5 and 7.6 m)
- ✓ 2 Winches: operate load and mast
elevation separately
- ✓ 4-Speed Load winches
- ✓ Infinite load height adjustment
- ✓ Ideal for job or shop

Available in
optional
galvanized
finish!




Two Winch System

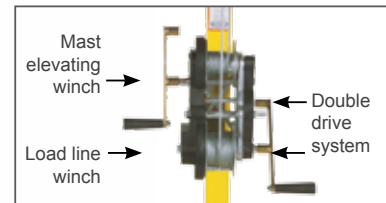


Mast and base sections
separate quickly for ease of
transportation and storage.



- ✓ Enables one man to perform as a crew – pays for itself in days!
- ✓ Lift and place loads in tight locations impossible for other lifts
- ✓ 8" casters (200 mm) permit full load to be positioned with ease
- ✓ Tee Head Extension available for wider loads up to 1,000 lbs (455 kg)
- ✓ Eliminates the need for come alongs, scaffolds, monorails and swing booms

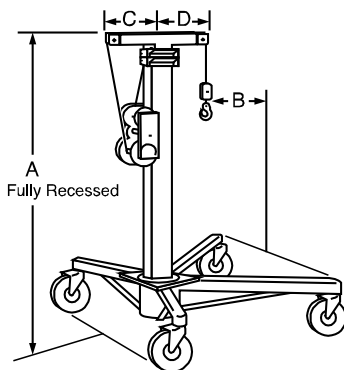


(see chart below for
specifications)

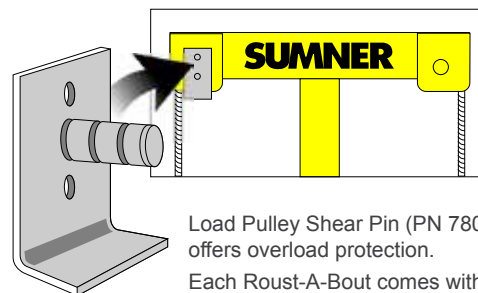


Load Pulley Shear Pin (PN 780192)
offers overload protection.
Each Roust-A-Bout comes with a spare
for quick, in-field resetting.

Part #	Description	Weight		A		B		C/D		Base		Max Height	
		lbs	kg	inch	cm	inch	cm	inch	cm	inch	cm		
780300	R-100 Roust-A-Bout 15' Top Height	330	150	79	200	20	50	12	30	32 x 40	80 x 100	15' 2-1/2"	4.6
780301	R-150 Roust-A-Bout 15' Top Height	336	152	79	200	20	50	12	30	40 x 40	100 x 100	15' 2-1/2"	4.6
780302	R-180 Roust-A-Bout 18' Top Height	403	183	126	320	25	63	14.5	36	50 x 50	125 x 125	17' 11-5/8"	5.5
780303	R-250 Roust-A-Bout 25' Top Height	493	224	119	302	30	75	17.5	44	60 x 60	150 x 150	25' 3/8"	7.6

The Roust-A-Bout™ Tackles the Tough Jobs:




The Roust-A-Bout lift operates in tight areas that are inaccessible for other lifts.




Loads can be lowered below floor level with the Roust-A-Bout lift's unique design.




Used in combination with Sumner's Adjust-A-Fit™, the Roust-A-Bout can maneuver awkward objects for easy placement.



One man can position objects weighing 1,500 lb (680 Kg) with infinite accuracy... up to 25 feet above!




Adjust-A-Fit™

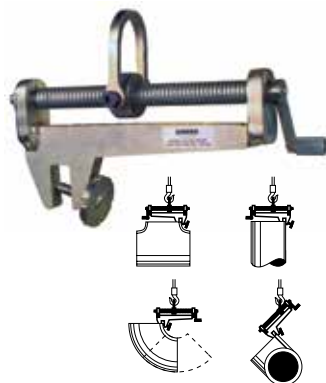

- ✓ Makes lining up fittings a trouble-free, one man operation
- ✓ Uses gravity to align fittings for loads up to 45°
- ✓ Fastens directly onto fittings for loads up to 1,000 lb (450 kg)
- ✓ Threaded shaft assembly is hardened for long tool life
- ✓ Cloverleaf setscrew and threaded shaft handle work from either side

Adjust-A-Flange™

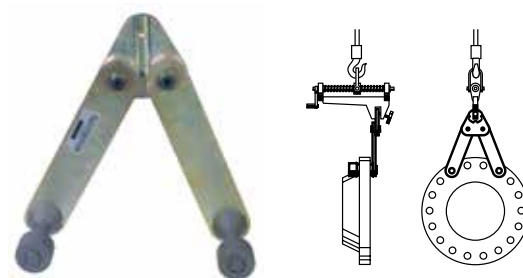

- ✓ Fits all flanges for 5" pipe and large with bolt holes 3/4 to 1-5/8" (19 to 42 mm)
- ✓ Used in combination with the Adjust-A-Fit to bring pipe flanges to exact plumb for tack and weld out
- ✓ Eliminates 75% of the hard work in pipe fitting when used with the Adjust-A-Fit and Roust-A-Bout
- ✓ Handles loads up to 1,000 lb (450 kg)
- ✓ Flange nuts serve as convenient reference points to check level


Part #	Description	Weight	
		Lb.	Kg.
780420	ST-104 Adjust-A-Fit	11.0	5.0
780425	ST-105 Adjust-A-Flange	11.0	5.0

Tee-Head Extension Bar

Lift Wider Loads with the Sumner Roust-A-Bout lift!



- ✓ Expands the Roust-A-Bout for handling bulky loads up to 1,000 lbs (455 kg)
- ✓ Takes only minutes to attach or detach

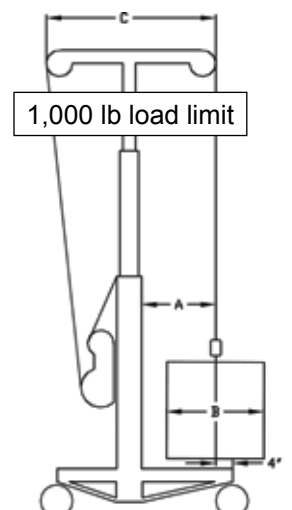

Part #	Description	Weight		A		B		C	
		lbs	kg	inch	cm	inch	cm	inch	cm
781060	R-100/150 Tee-Head Extension Bar	21	9.5	22	55	43	108	48	120
781061	R-180 Tee-Head Extension Bar	24	11.0	29	73	58	145	63	158
781062	R-250 Tee-Head Extension Bar	33	15.0	37	93	73	183	68	173

Caution: Load center is moved to only 4" back of front casters, decreasing stability. Use carefully and only on bulky loads up to 1,000 lb/455 kg.

FAB-MATE™

SUMNER^{*}
A Southwire Company

The Hoist for all Fab Shop Needs!

SPECIALTY LIFTS



- ✓ 1,000 lb capacity (450 kg), 7 ft (2.1 m) lifting capacity
- ✓ Moves loads vertically and horizontally at the same time
- ✓ Sumner-built single-speed winch offers infinite positioning for accurate fit-ups
- ✓ 8" casters (200 mm) and special base allows load to "get close to the work"
- ✓ Accessories make Fab-Mate hoist extremely versatile
- ✓ Priced for all budgets

Capable of lifting
20' lengths (6.0 m)
of 10" pipe



Position fittings with
Sumner Adjust-A-Fit™

(See Sumner Welding
Make-Up Tools catalog)



Align flanges with
Sumner Adjust-A-Flange™

(See Sumner Welding
Make-Up Tools catalog)



Move plate with
plate lifting clamp

Part #	Description	Height		Width		Length		Weight	
		inch	cm	inch	cm	inch	cm	lbs	kg
783900	Fab-Mate	88-1/2	224	35	89	44	111	204	92.5

SERIES 1900

Material Lift



Specifications	1908	1910
Height Stowed	5' 8 1/4" / 1.73 m	6' 7.5" / 2.02 m
Forks Down	8' 2" / 2.49 m	9' 9.5" / 2.98 m
Width Max	3' 6 3/4" / 1.08 m	3' 6 3/4" / 1.08 m
Width Min	2' 4 1/2" / .72 m	2' 4 1/2" / .72 m
Inside Max	3' 3/4" / .93 m	3' 3/4" / .93 m
Length Stowed	1' 4.5" / .42 m	1' 4.5" / .42 m
Length Operating	3' 10" / 1.16 m	3' 10" / 1.16 m
Weight	168 lb / 76 kg	172 lb / 78 kg
Load Capacity	400 lb / 180 kg	350 lb / 160 kg

Part #	Description	lb	kg
782050	Series 1908, 8' H, 400 lb	168	76
782051	Series 1910, 10' H, 350 lb	172	78

SERIES 2000 MATERIAL LIFT

The Series 2000 is built for heavy material and continuous work. This compact lift offers strong mast design and a superior cabling system. The shorter mast sections allow the 2000 to fit through standard doorways without tipping. The compact design fits nicely into vehicles and requires little storage space.

SERIES 2100 CONTRACTOR LIFT

Unmatched as a good all around contractor lift, the Series 2100 features a taller mast to reach desired work heights while requiring fewer mast sections. Hence, the 2100 is less expensive and lighter. The base, forks, winch, etc., are the same as the Series 2000.





Hold-Down Bar

Standard hold-down bar retains carriage assembly during transport. Hold-down bar is spring-loaded, retracts and stores behind mast when not in use.

Part # 783040



Reversible Forks

Forks easily remove by pulling plunger pins and can be reversed for added height or to get flush with ceiling.

Available in
Optional Galvanized
Finish!
Part # 776270



Ideal for Compact Storage

No tools or loose hardware to worry about. Leg lock mechanism releases by pulling plunger pins and locks in the stored position. Leg rollers allow lift to be wheeled around. Forks also remove by pulling plunger pins.



Series 2000

Series 2100

Part No.	Description	Max Height		Lifting Capacity		Lift Weight		Shipping Weight	
		Feet	Meter	lbs	kg	lbs	kg	lbs	kg
783700	2010 Material Lift	11' 7-1/8"	3.5	1,000	455.0	188	85.5	223	104.4
783701	2015 Material Lift	16' 2-1/2"	4.9	800	360.0	280	127.3	315	143.2
783702	2020 Material Lift	20' 9-3/4"	6.3	800	360.0	355	161.4	390	177.3
783703	2025 Material Lift	25' 5-1/8"	7.7	650	300.0	430	195.5	465	211.4
783650	2112 Contractor Lift	12' 11-3/8"	3.9	650	300.0	252	114.5	287	130.5
783651	2118 Contractor Lift	18' 4-3/8"	5.6	650	300.0	321	145.9	356	161.8
783652	2124 Contractor Lift	23' 9-3/8"	7.2	650	300.0	366	166.0	399	181.4



Boom Carriage (Part # 783642)

Ideal for installing pipe or lifting "from the top" applications. Uses four attaching plunger pins and has a 40" (100 cm) reach. Hook has five locations with load capacities of:
650 lbs (300 kg), 525 lbs (240 kg)
425 lbs (195 kg), 300 lbs (135 kg)
200 lbs (90 kg)



Pipe Cradle (Part # 783705)

Great for duct pipe or other HVAC applications. Slides over standard forks. Packaged in sets of two.



Fork Extensions (Part # 783691)

With the push of a button, forks may be extended from 28" to 42" (71–106 cm). With longer forks, the weight capacity decreases to 200 lbs (90 kg) and is clearly displayed on the forks when extended. A second button returns the extension for convenient storage inside the forks.



Steering Handle (Part # 786695)

Optional steering handle improves maneuverability of lift. With a push of a release button, handle folds out of the operator's way.



Two Speed Winch Handle Kit (Factory Installed Part # 783765)

The two speed winch handle offers a standard speed setting or a high speed setting for quickly positioning forks in half the time. Available only on Series 2100 lifts commencing with serial number 9433. For field installation kit, use part #783761.

Part #	Description
783882	Safety brake - 2010 & 2112
783883	Safety brake - 2015 & 2118
783884	Safety brake - 2020 & 2124
783885	Safety brake - 2025

Safety Brake

Each mast and carriage can have a factory installed, gravity actuated safety brake which holds loads in place to help avoid any slack in the cable.

Series 2000 Material Lift Dimensions	2010		2015		2020		2025	
Height - stowed	76"	1.93 m	76"	1.93 m	76"	1.93 m	76"	1.93 m
Length - stowed	34"	0.86 m	34"	0.86 m	34"	0.86 m	34"	0.86 m
Height - operating	76"	1.93 m	76"	1.93 m	76"	1.93 m	76"	1.93 m
Length - operating	62"	1.57 m	62"	1.57 m	73"	1.84 m	73"	1.84 m
Base width	31-1/4"	0.80 m	31-1/4"	0.80 m	31-1/4"	0.80 m	31-1/4"	0.80 m
Width with stabilizer legs	74"	1.88 m	74"	1.88 m	74"	1.88 m	74"	1.88 m
Ground clearance	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm
Load height (minimum)	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm
Maximum height (forks down)	9' 7-1/2"	2.9 m	14' 2-3/4"	4.3 m	18' 10"	5.7 m	23' 5-3/8"	7.1 m
Maximum height (forks reversed)	11' 7-1/8"	3.5 m	16' 2-1/2"	4.9 m	20' 9-3/4"	6.3 m	25' 5-1/8"	7.7 m
Series 2100 Contractor Lift Dimensions	2112		2118		2124			
Height - stowed	84"	2.13 m	84"	2.13 m	84"	2.13 m		
Length - stowed	34"	0.86 m	34"	0.86 m	34"	0.86 m		
Height - operating	84"	2.13 m	84"	2.13 m	84"	2.13 m		
Length - operating	62"	1.57 m	73"	1.84 m	73"	1.84 m		
Base width	31-1/4"	0.80 m	31-1/4"	0.80 m	31-1/4"	0.80 m		
Width with stabilizer legs	74"	1.88 m	74"	1.88 m	74"	1.88 m		
Ground clearance	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm		
Load height (minimum)	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm		
Maximum height (forks down)	10' 11-5/8"	3.3 m	16' 4-5/8"	5.0 m	21' 9-5/8"	6.6 m		
Maximum height (forks reversed)	12' 11-3/8"	3.9 m	18' 4-3/8"	5.6 m	23' 9-3/8"	7.2 m		

SERIES 2200

LIL' HOISTER™ LIFT

2208 LIFT



2210 LIFT



*Lightweight...
Transportable...*

*Ideal for many
lifting tasks!*



Just a few applications for the Lil' Hoister Lift:

- HVAC compressor Installation
- Loading and unloading equipment & material from service vehicles
- Cabinet installation
- Lifting electrical trays
- Positioning pipe & ducts
- Installing air conditioners
- Handling machine parts & tooling
- Loading equipment in rental yards
- Hoisting small beams
- Positioning hospital TVs
- Hauling & lifting cement bags
- Installing appliances
- Removing electrical motors
- Installing light fixtures

SERIES 2200

LIL' HOISTER™ LIFT

SUMNER
A Southwire Company

Fold-out Roller Wheels

Great for rolling
lift in and out of
vans and trucks



Convenient Handle

(Model 2208)

Enables use as a
hand truck



Two Speed Winch Handle

The two speed option
allows the operator to raise
and lower loads at standard
speed or at high speed
(less than half the time
of standard).

Strap feeds away from
the operator
— no more cable
in the face.



Standard
Speed Position



High
Speed Position

Mast Braces

For extra strength
and support

8" Non-marring wheels



2208 Lift (Part # 784308)



The handy, double-masted
2208 Lift has many
applications including
positioning hospital TVs,
equipment installation and
wall-mounting AC units.

Height max. (forks up)	9' 1/4"	2.7 m
Height max. (forks down)	8' 0"	2.4 m
Lift capacity	300 lbs	135 kg
Height stowed	57"	145 cm
Length stowed	13"	33 cm
Length operating	41"	104 cm
Width stowed	26"	66 cm
Width max	31"	79 cm
Winch cranks per ft/m	8	24
Basic weight	98 lbs	44.4 kg

2210 Lift (Part # 784310)



The double-masted 2210 Lift
offers the capability of lifting
light fixtures or AC units in low
ceiling buildings. Its forks fit
between most acoustical
ceiling tiles.

Height max. (forks up)	11' 1/4"	3.4 m
Height max. (forks down)	10' 0"	3.0 m
Lift capacity	300 lbs	135 kg
Height stowed	70"	178 cm
Length stowed	13"	33 cm
Length operating	41"	104 cm
Width stowed	26"	66 cm
Width max	31"	79 cm
Winch cranks per ft/m	8	24
Basic weight	108 lbs	49 kg

Checkout the Features!

1" Nylon Strap

— no more cable kinks.

Dual I-beam Mast Design

Compact, light weight but strong.



Reversible Forks

Two plunger pins permit quick release of forks. Forks may be removed for storage or reversed for added height.

Mast Hold Down

Heavy duty spring clamps fasten the strap to the side of the fork assembly.

Double Row Casters

Two 2" (5 cm) casters permit easy handling of heavy loads.

Reversing Handle

For convenient, out of the way storage.


Compact Storage

Remove forks and reposition legs for space saving storage.



Legs Extend for Greater Stability

Plunger pin action allows quick adjustment.



Optional Features Available for Series 2200 Lifts



Aluminum Tray (Part # 784240)

Lightweight and rust free, this 18" x 22" (46 x 56 cm) aluminum tray slides on to forks and attaches quickly and safely with spring-loaded plunger pins.



Wheel Brake Kit (Part # 784218)

Easy to assemble brake kit for 8" (20 cm) wheels prevents lift from moving while being loaded. Recommended for use with the aluminum tray.



Dually Wheel Kit (Part # 784258)

Ideal for use on grass or dirt or when the lift is used as a hand truck.

SERIES 2300

DRYWALL/HVAC LIFT

SUMNER
A Southwire Company

One Man
Operation!

MATERIAL LIFTS



- Solid, safe construction (CE)
- Two speed winch handle
- Quick, tool-free assembly
- One person operation
- Tilts 65° for drywall installation
- Lifts loads of 150 lbs (70 kg) up to 11 ft (3.4 m) or 15 ft (4.5 m)
- Lightweight



CE

Checkout the Features...

Self-braking winch with two speed winch handle. No spinning wheels, no free fall, no pinched fingers!



Lo Speed



Hi Speed




Stored Position



Convenient
carrying
handle



Fold-up steering lever allows operator to stand back and guide load to exact location

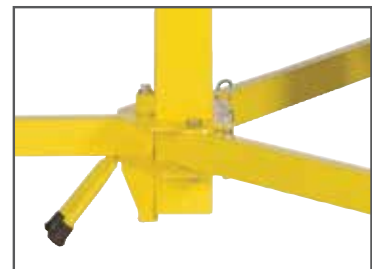

Back stop brake prevents lift from backing up while unloading drywall panels

Series 2300 Features

Cradle arm can be set to multiple positions (up to 65 degrees) using plunger pins, or cradle can float freely.

Cradle arms mount quickly using plunger pins



Convenient carrying handle



Fold-up steering lever



Base legs fold up to compact package for storage



Protective caps prevent drywall damage

Cradle outriggers pull out to accommodate drywall panels



Self-braking winch with two speed winch handle. No spinning wheels, no free fall, no pinched fingers!




Lo Speed



Hi Speed

Instruction manual



Back stop brake

4" (10cm) locking casters



Fits in a car trunk!

2311 & 2315 Lifts

Perfect for Drywall Installation!



Base legs adjust for travel through standard doorways —with or without load.



Steering leveler provides optimum positioning.



Cradle tilts up to 45° for cathedral ceilings.

MATERIAL LIFTS

DRYWALL LIFT CART

Part # 784510


Mast, base and cradle fit neatly and securely on the truck. The 10" wheels are ideal for job site terrain or going up or down stairs.




Part #	Description	Weight	
		lbs	kg
784510	Drywall Lift Cart	39.0	17.7

Series 2300 Specifications


Drywall Cradle Assembly (Part # 784355)

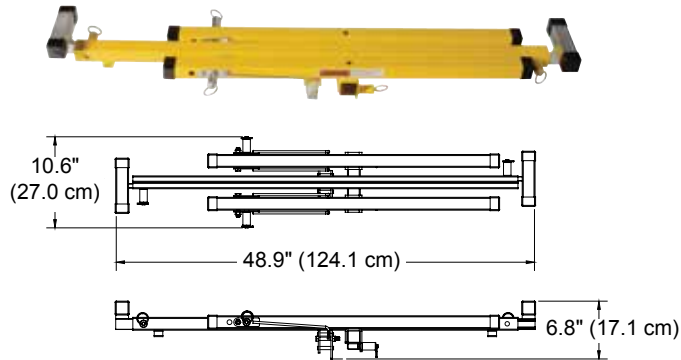

HVAC/Light Cradle (Part # 784474) Optional


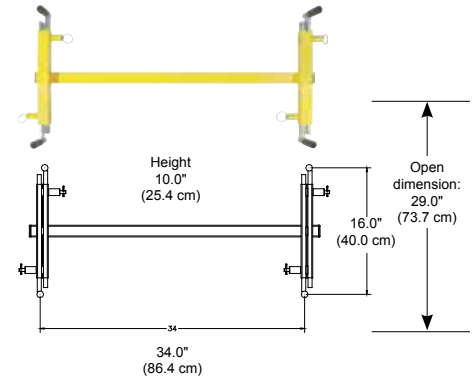


Base Assembly (Part # 784420)


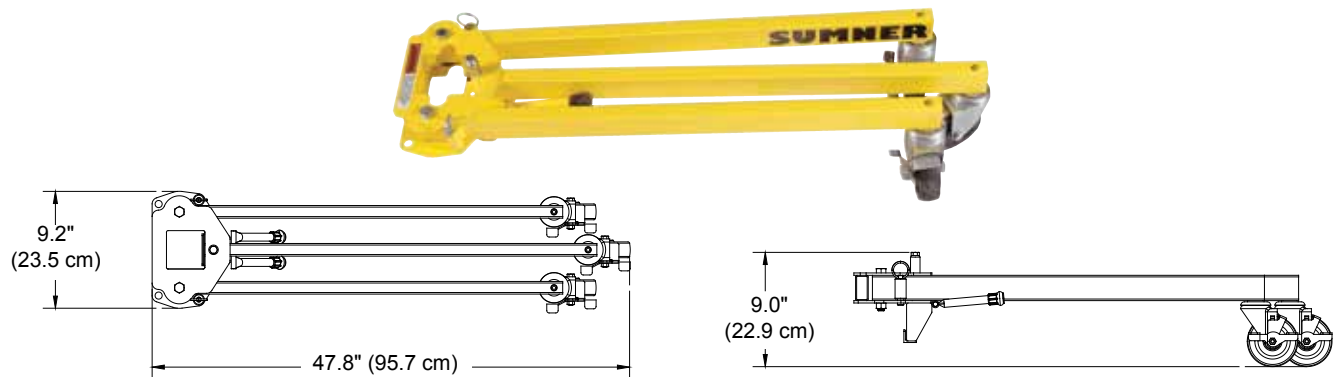


Mast Assembly

2311 (Part # 784347)

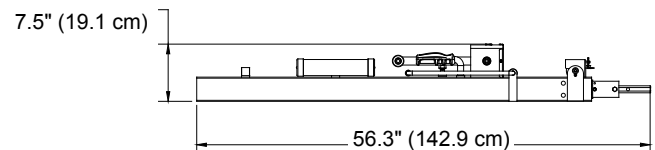

2315 (Part # 784352)

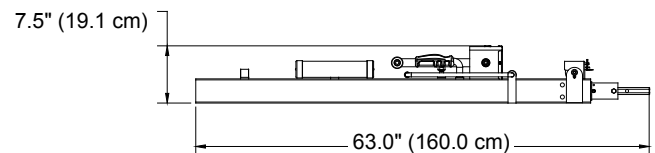

		Load Height (maximum)		Load Height (minimum)		Load Capacity		Max. Drywall Dimensions		Base Height		Base Footprint (open)		Lift Weight	
Part #	Description	Feet	Meter	Inch	cm	Lb	Kg	Feet	Meter	Inch	cm	Inches	M-eters	lbs	kg
784345	2311 Drywall Lift	11' 2-3/4"	3.4	34"	86	150	70	4 x 12	1.2 x 3.7	7"	18	55 x 55 x 52	1.4 x 1.4 x 1.3	109	49.4
784346	2315 Drywall Lift	14' 9-3/4"	4.5	48"	122			N/A	115					52.1	
784332	2315 HVAC Lift								87					39.5	

SERIES 2400 CONTRACTOR LIFT

SUMNER
A Southwire Company

MATERIAL LIFTS



**NOW
12 or 16ft.
Models!**

- ✓ Super Compact 12 ft (3.7 m) & 16 ft (4.9 m) lifts
- ✓ 450 lbs (200 kg) lift capacity
- ✓ One piece construction –no loose pieces
- ✓ Easily portable for one person operation
- ✓ Fits most SUVs and vans
- ✓ 12' 11-3/4" & 16' 11-3/8" heights when forks reversed



The Perfect Lift for:

- HVAC contractors
- Electrical contractors
- Industrial maintenance
- Steel erectors
- Facility management

Ideal for Compact Storage

No tools or loose hardware to worry about. Leg lock mechanism releases with plunger pin and slides on base leg.



Leg roller allows unit to wheel in stored position.



Series 2400 Lift Product Features



Fits in most vans



Reversible Forks

Two plunger pins permit quick release of forks. Forks may be removed for storage or reversed for added height.

Inside-Mast Cable Feed

Cable feeds inside mast, removed from the operator for safety – similar to the 2000 and 2100 Series lifts.

Double Row Casters

- Four 3" (7.5 cm) casters permit easy handling of heavy loads
- Swivel independently
- Lockable to insure safety
- Allow for multi-directional positioning of lift

Pulley Guards

Contains load cable... line cannot come off.



Handle

Use convenient handle for "hand truck" mobility and to position lift at point of use.

Winch

Coffee grinder style winch features auto-braking and detachable winch handles.

Roller Wheels

Handy wheels located to ease rolling into vehicles for transportation.

8" (20 cm) non-marring wheels

Hold-Down Bar

Hold-down bar retains carriage assembly during transport. Hold-down bar is spring-loaded, retracts and stores behind mast when not in use.

Fast Action Stabilizer Legs

Mounted on base top, stabilizer legs fold down with ease and lock in place. 2416 only.

Series 2400 Contractor Lift	2412		2416	
Part No.	784750		784751	
Height Max (forks up)	12' 11-3/4"	4.0 m	16' 11-3/8"	5.2 m
Height Max (forks down)	12'	3.7 m	15' 11-5/8"	4.9 m
Lift Capacity	450 lbs	200 kg	450 lbs	200 kg
Height Stowed	62-3/4"	159.4 cm	62-3/4"	159.4 cm
Length Stowed	23"	58.4 cm	23"	58.4 cm
Length Operating	48"	121.9 cm	48"	121.9 cm
Width Stowed	26-3/8"	67.1 cm	26-3/8"	67.1 cm
Width Max	26-3/8"	67.1 cm	55-1/4"	140.3 cm
Winch Cranks per ft/m	8/ft	24/m	8/ft	24/m
Basic Weight	195 lbs	88.5 kg	243 lbs	110.2 kg

Optional:
Galvanized Finish
Part # - 776270



SERIES 2400

CONTRACTOR LIFT

Series 2400 Lift Optional Features


Optional Safety Brakes (Part # 784755)

Each mast and carriage can have a factory installed, gravity actuated safety brake which holds loads in place to help avoid any slack in the cable.



Fork Extension (Part # 784695)

With the push of a button, forks may be extended from 23-1/4" (59.2 cm) to 29-7/16" (75.7 cm). When using the fork extensions the weight capacity reduces to 200 lbs (90 kg), as is clearly marked on the extended forks. A second button returns the extension for storage inside forks.

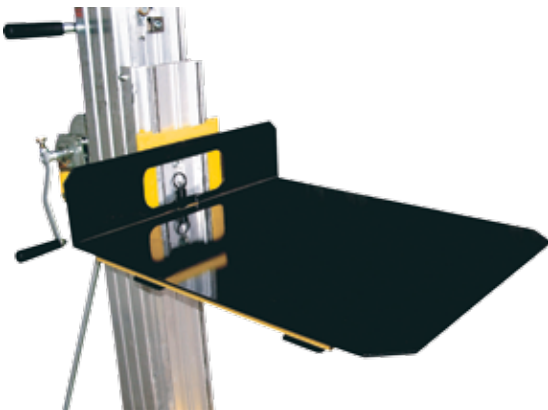

Tray (Part # 784320)

24" x 28" (61 x 71 cm)

Steel tray slides onto forks.



Pipe Cradle (Part # 783705)

Great for air ducts or other HVAC applications. Slides over forks. Packaged two per set.

Series 2500 Lift Product Features

- ✓ No front legs to interfere with lifting
- ✓ Cart & mast section breakdown for ease of transportation
- ✓ 650 - 1,000 lb (300 - 455 kg) lifting capacity
- ✓ All galvanized finish

SERIES 2500 COUNTER WEIGHT LIFT

- ✓ Great for hanging pipe against wall
- ✓ Four heights 10' - 25' (3 - 7 m)
- ✓ 2 speed winch



Can reach up
to 2nd floor





Works around ground
obstructions



Great for next to
wall applications

Series 2500 Lift Product Features

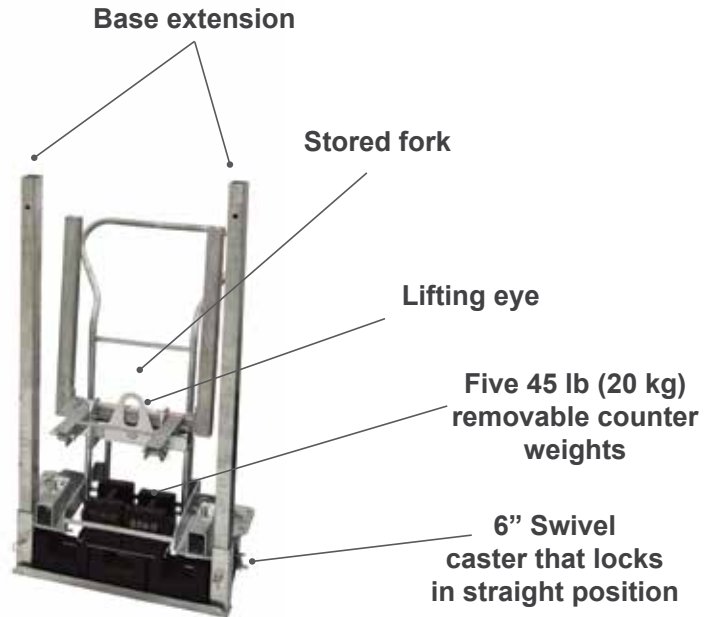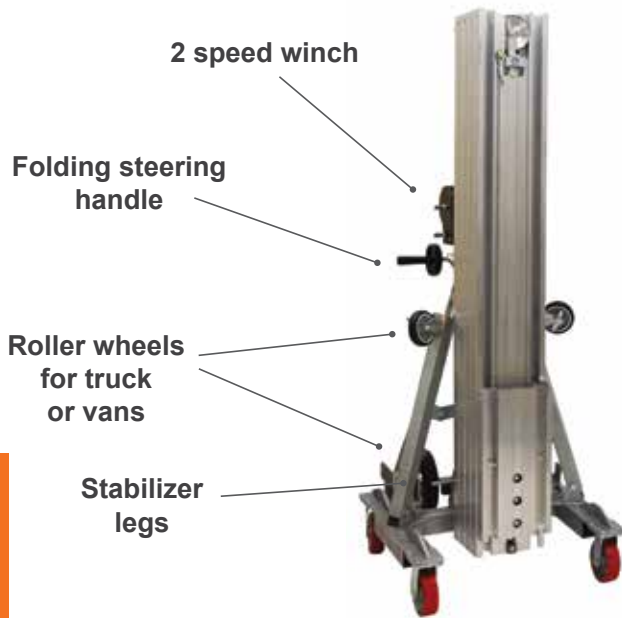

Cart and base assembly with quick action attaching plunger pins.



Adjustment base leveling screw to accommodates base extensions on unlevel floors.



Pulleys fully enclosed to retain cable.



Mast lifting eye.

2500 Lift Accessories



Part # 783705

Pipe Cradle is great for duct pipe or other HVAC applications. Slides over standard forks.



Part # 786645

Boom Carriage works well with glass lifting machinery.

Optional Safety Brakes - Each mast and carriage can have a factory installed, gravity actuated safety brake which holds loads in place to help avoid any slack in the cable.

Part #	Description
783882	2510 Safety Brake Option
783883	2515 Safety Brake Option
783884	2520 Safety Brake Option
783885	2525 Safety Brake Option



Winch operates from side of lift for safety and not between extension legs.



Mast section moves easily with adjustment steering level. Fits through doorway.



Because of hand cart design, moving forks, extensions and weights on the job is simple.





Mast roller wheels help roll mast section into vehicle.




Lift	Part #	Weight		Safety Brake Option
		lb	kg	
2510	786510	644.0	292.7	783882
2515	786511	681.0	314.1	783883
2520	786512	738.0	355.5	783884
2525	786513	785.0	356.8	783885

Series 2500 Material Lift Dimensions	2510		2515		2520		2525	
Ground Clearance	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm	2-1/2"	6.4 cm
Load Height (minimum)	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm	6"	15.2 cm
Maximum Height (forks down)	9' 8-1/2"	2.9 m	14' 4"	4.3 m	18' 10"	5.7 m	23' 5-3/8"	7.1 m
Maximum Height (forks up)	11' 8 1/4"	3.6 m	16' 3 1/2"	4.9 m	21'	6.4 m	25' 7-3/8"	7.8 m

MATERIAL LIFTS

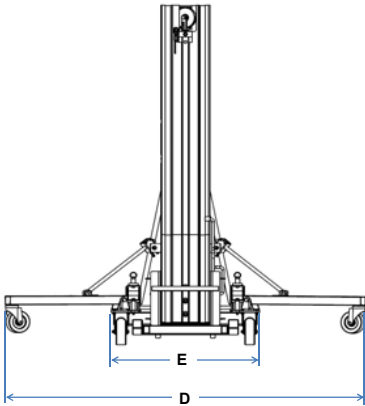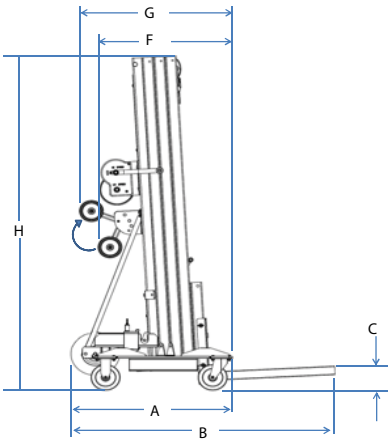

	A		B		C		D		E		F		G		H	
	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM	IN	CM
2510	33.0	83.8	50.5	128.3	5.5	14.0	72.5	184.2	30.0	76.2	46.0	116.8	50.0	127.0	77.75	197.4
2515	33.0	83.8	53.0	134.6	5.5	14.0	72.5	184.2	30.0	78.7	46.0	116.8	50.0	127.0	77.75	197.4
2520	33.0	83.8	55.0	141.0	5.5	14.0	72.5	184.2	30.0	81.3	46.0	116.8	50.0	127.0	77.75	197.4
2525	33.0	83.8	58.0	147.3	5.5	14.0	72.5	184.2	30.0	83.8	46.0	116.8	50.0	127.0	77.75	197.4

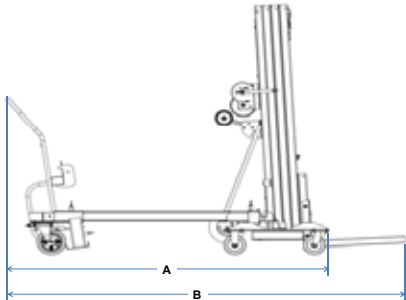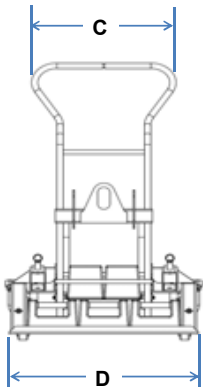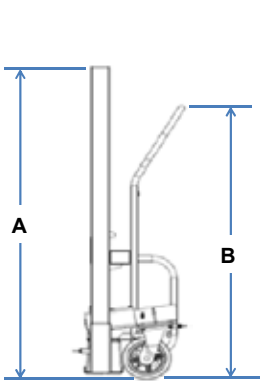

A		B		C		D	
IN	CM	IN	CM	IN	CM	IN	CM
63.0	160.0	49.0	124.5	23.0	58.4	31.5	80.0

	A		B	
	IN	CM	IN	CM
2510	89.5	227.3	108.5	275.6
2515	92.0	233.7	110.0	281.9
2520	94.5	240.0	113.5	288.3
2525	97.0	264.4	116.0	294.6

NEW!

SERIES 2600 AXEL, THE BIG LIFT



Shown in optional galvanized finish

- ✓ 10 or 15 ft (3 - 4.6 m)
- ✓ 1,100 lb (500 kg) capacity
- ✓ 2 speed winch
- ✓ Travels through doorway
- ✓ Legs fold for compact storage
- ✓ Rolls into vehicles
- ✓ Adjustable steering level handle



Legs unlock with plunger pin and fold up for storage. Roller wheels under each leg for ease of moving lift in stored position.



Rugged two speed winch makes lifting heavy loads a snap.



Aluminum pulleys enclosed to prevent cable from coming off.



Mast roller wheels help to roll lift into vehicles.



Mast hold bar for horizontal transportation. Hold down bar can be reshaped if bent.



Nifty lifting hook for crane use.

Series 2600 Lift

Product Features & Specifications



Adjustable steering handle that pops out of way with push button.



Forks can quickly be reversed with plunger pins.



Outrigger locking mechanism locks legs both in stored or operating position.

Note: Outriggers standard on 15' model, optional on 10' model.



With push of a button, optional fork extensions extend forks extra 8" / 20 cm. Extensions store in forks. Extension capacity 450lb / 205kg. Part # 783163.

Optional Safety Brakes - Each mast and carriage can have a factory installed, gravity actuated safety brake which holds loads in place to help avoid any slack in the cable.

Part #	Description
783882	10' Safety Brakes
783883	15' Safety Brakes

Technical Data	2610 Part # 783065		2615 Part # 783067	
Pay Load	1100 lb	500 kg	1100 lb	500 kg
Lifting height - forks down	9' 10"	3.0 m	14' 5"	4.4 m
Lifting height - forks reversed	11' 10"	3.6 m	16' 5"	5.0 m
Length - working	62"	157.5 cm	62"	157.5 cm
Width - working	74.5	189.2 cm	74.5	189.2 cm
Height - working	76"	193 cm	76"	193 cm
Min. load height	4"	10 cm	4"	10 cm
Ground clearance	2.5"	6.4 cm	2.5"	6.4 cm
Length - stowed	34 "	86.4 cm	34 "	86.4 cm
Width - stowed:	31.5"	80 cm	31.5"	80 cm
Height - stowed:	76.5 "	194.3 cm	76.5 "	194.3 cm
Weight Lift	292 lb	132.5 kg	346 lb	157 kg
10' Safety Brakes	783882			
15' Safety Brakes			783883	
Fork Extension	783163			
Galvanized Finish	783066		783068	

All Aluminum Gantries

NEW!



**5 Ton
5 Metric Ton
11,000 lbs**

**2 Ton
2 Metric Ton
4,400 lbs**

**3/4 Ton
3/4 Metric Ton
1,650 lbs**



- ✓ Light Weight
- ✓ Extremely Portable
- ✓ Minimum Parts
- ✓ Quick Height Adjustment

- ✓ Quick Set Up & Tear Down
- ✓ Adjustable Span
- ✓ Anodized Finish
- ✓ Pinch Point Free



GH 3/4 & GH2T Product Features

Innovative Mast Height Adjustment



Adjust mast lifting handle with plunger pin to comfortable lifting position



Lift mast and remove quick-action mast locking pin



A-frame legs lock in closed position – no bolts



Push button leg lock release & locking



A-Frame legs lock in closed or opened position



No pinch points – spacer prevents pinched fingers



Tool-free A-Frame operation with instructions tube



Casters can be locked at 90 degree angle for easy transport

GH 3/4T & GH2T Gantry Assembly




Open
"A" Frame



Lay out
beam & "A"
Frames



Attach with
one bolt to
each
"A" Frame

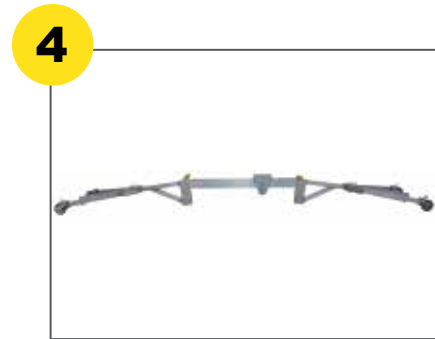

Ready
to Lift



Raise
the
Frame



Raised
Frame



Raise
2nd
"A" Frame



Attach 2nd
bolts &
tighten all

GH 3/4 Wheel Options



8" caster with foot brake & four 90 degree locking positions



Optional 10" flat free, double-wheel caster has both position and wheels lock. Available on GH3/4T only.



GH2T Beam span adjustment on 10 ft (3 m) lengths & longer

GH5T GANTRY SERIES

- ✓ All aluminum
- ✓ 5 metric ton / 11,000 lb
- ✓ Push button A-Frame leg lock & release



Chain hoist
not included

- ✓ Built in mast winch
- ✓ Caster with wheel & swivel lock



Built in mast winch raises and lowers beam with ease. Mast locking pin sets mast with no bolts.



Folding third mast leg makes moving A-Frame effortless.

Erecting GH5T



The GH5T comes with chain & ratchet to pull A-Frame legs together.




Ratchet 1st A-Frame bolt to beam.



Ratchet 2nd A-Frame until it can be pushed into place.

Gantry Lift Dimensions

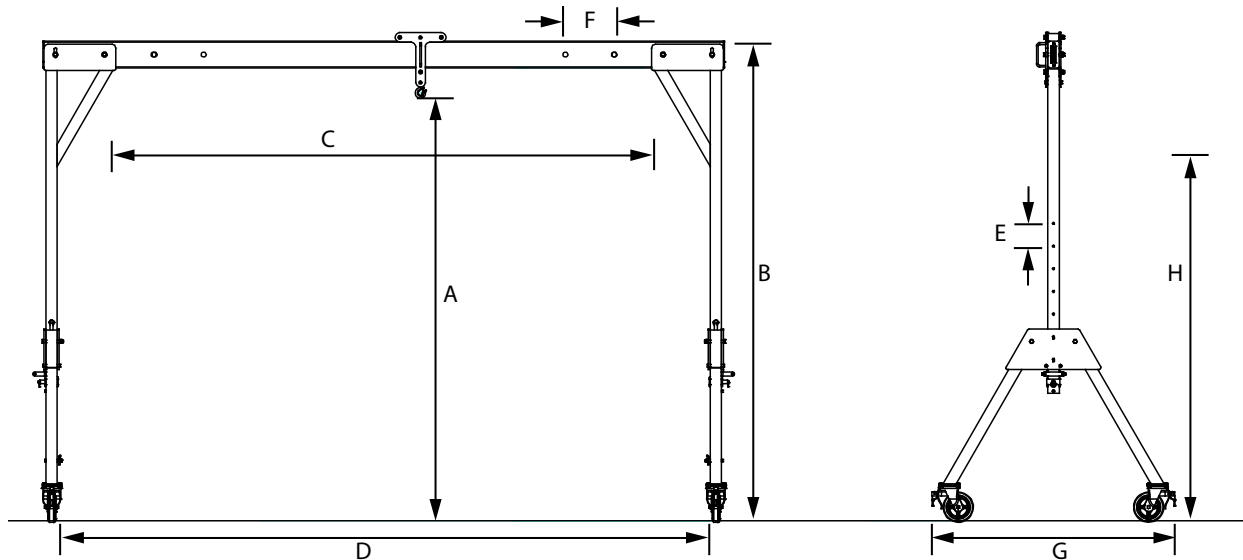

			A	B	C	D	E	F	G	H
			Max/Min Height to Lifting Eye	Max Height to top of Trolley	Max Working Span	Span Between Wheels	Height Adjustment	Span Adjustment	Max Width of "A" Frame	Max Height of "A" Frame
GH3/4T	785301	GH3/4T-15 (15' / 8" casters)	116"	128.75"	154" (391.2 cm)	172" (436.9 cm)	6" (15.2 cm)	9" (22 cm)	60.625" (154 cm)	100" (254 cm)
GH3/4T	785303	GH3/4T-12 (12' / 8" casters)	86"		118" (299.7 cm)	136" (345.4 cm)				
GH3/4T	785305	GH3/4T-10 (10' / 8" casters)	86"		94" (238.8 cm)	112" (284.5 cm)				
			(218.4 cm)							
GH3/4T	785300	GH3/4T-15 (15' / 10" casters)	118"	130.5"	154" (391.2 cm)	167.5" (425.5 cm)	6" (15.2 cm)	13" (33 cm)	60.625" (154 cm)	100" (254 cm)
GH3/4T	785302	GH3/4T-12 (12' / 10" casters)	88"		118" (299.7 cm)	131.5" (334.0 cm)				
GH3/4T	785304	GH3/4T-10 (10' / 10" casters)	88"		94" (238.8 cm)	107.5" (273.1 cm)				
GH3/4T	785306	GH3/4T-10 (8' / 10" casters)	88"		70" (177.8 cm)	83.5" (212.1 cm)				
GH2T	785100	GH2T-15 (15' / 10" casters)	114"	128.5"	142" (360.7 cm)	181" (459.7 cm)	6" (15.2 cm)	13" (33 cm)	60.625" (154 cm)	100" (254 cm)
GH2T	785101	GH2T-12 (12' / 10" casters)	84"		106" (269.2 cm)	144" (365.8 cm)				
GH2T	785102	GH2T-10 (10' / 10" casters)	84"		82" (208.3 cm)	120" (304.8 cm)				
GH2T	785103	GH2T-10 (8' / 10" casters)	84"		58" (147.3 cm)	96" (243.8 cm)				
GH5T	785805	GH5T (15' Beam)	168.5"	185"	132" (335.28 cm)	172" (436.88 cm)	6" (15.2 cm)	19" (48.26 cm)	75" (190.5 cm)	184" (375.9 cm)
GH5T	785806	GH5T (12' Beam)	168.5"	185"	96" (243.84 cm)	144" (365.76 cm)				

Gantries come with two A-Frames with casters, Trolley, Cross Beam and attaching hardware.

	Gantry Model	Weight		Beam Part #	Beam Model	Weight	
		lbs	kg			lbs	kg
785301	GH3/4T-15 (15' / 8" casters)	270.0	122.5	785320	15'	68.5	31.0
785303	GH3/4T-12 (12' / 8" casters)	258.0	117.0	785321	12'	55.0	24.9
785305	GH3/4T-10 (10' / 8" casters)	250.0	113.4	785322	10'	46.0	20.8
785307	GH3/4T-8 (8' / 8" casters)	242.0	109.8	785323	8'	37.0	16.7
785300	GH3/4T-15 (15' / 10" wheels)	274.0	124.3	785320	15'	68.5	31.0
785302	GH3/4T-12 (12' / 10" wheels)	262.0	118.8	785321	12'	55.0	24.9
785304	GH3/4T-10 (10' / 10" wheels)	254.0	115.2	785322	10'	46.0	20.8
785306	GH3/4T-8 (8' / 10" wheels)	246.0	111.6	785323	8'	37.0	16.7
785100	GH2T-15 (15' Beam)	323.0	146.5	785150	15'	82.0	37.1
785101	GH2T-12 (12' Beam)	307.0	139.2	785151	12'	65.6	29.7
785102	GH2T-10 (10' Beam)	296.0	134.2	785152	10'	54.7	24.8
785805	GH5T-15 (15' Beam)	689.0	312.5	785815	15'	125.0	57.0
785806	GH5T-12 (12' Beam)	664.0	301.2	785816	12'	100.0	45.0

15 ft. beam has two adjustment positions.

12 ft. & 10 ft. beam has one adjustment position.

8 ft. beam has no adjustment positions.

GH5T has no adjustment positions.

EVENTERTM

THEATRICAL LIFTS

For Lifting Lights & Speakers

The Perfect Lifts for all Venues:

- Changes from operating to stored position in less than five minutes
- Rolls into standard box truck
- All black—no draping needed
- Sturdy construction for operating in windy conditions



EVENTER™ - Lifts for the Entertainment Industry

Same Standard Features on All EVENTER Models:

- ✓ Blackened anodized mast
- ✓ Fits through standard doorways in stowed position
- ✓ No winch cable in operator's face
- ✓ Forks reverse for added height
- ✓ Large, rubber-padded leveling jacks
- ✓ Built-in safety brakes




All pulleys are covered to prevent cable from slipping off



No Cable in Operator's Face

Guide Roller Directs Cable Evenly on Winch Drum



Operator's Instructions in Steel Tube

Reposition Winch Handles After Operating



Handles in stored position



Handles removed for safety during performance

Bubble Vial for Leveling

Auxiliary Wheels Make Rolling Lift into Vans Easy

Large, Non-marring Wheels for Transport and Positioning (Eventer 16 Only)



EVENTER 16TM

THEATRICAL LIFT


Ideal for small to medium venues:

- Hotel Ballrooms
- Churches
- Schools
- Clubs

- ✓ 16' (4.9 m) lift height
- ✓ 500 lb (225 kg) lift capacity
- ✓ Load lift at comfortable height
- ✓ Uses applied adapters



The EVENTER 16 is easily transportable

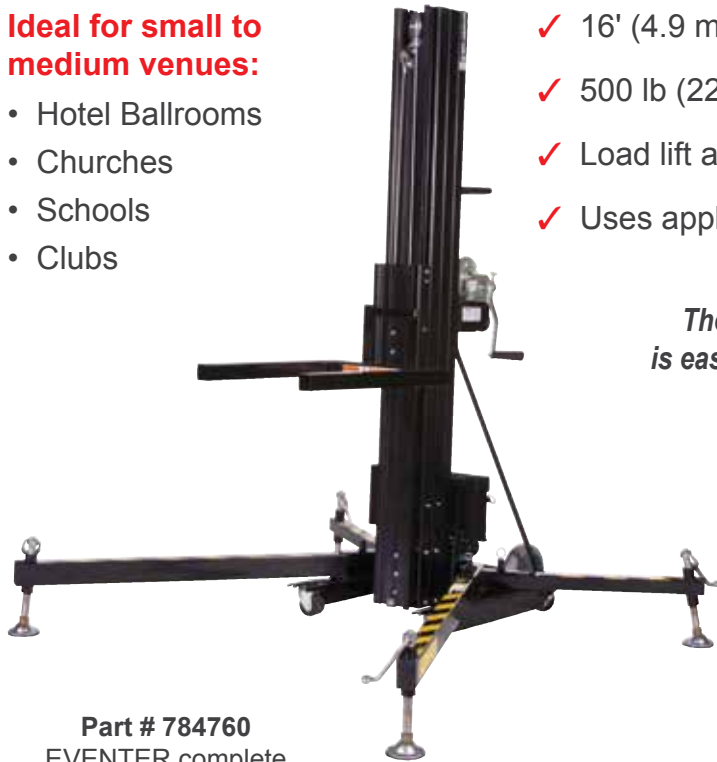

Part # 784760
EVENTER complete with reversible forks



Part # 784760
Eventer 16 with reversible forks for an extra 12" (30 cm) in lift height



Part # 784761
Eventer 16 uses Applied adapter (not included)

EVENTER 20/25TM

THEATRICAL LIFTS

EVENTER 20 (Part # 783801)

- ✓ 20' (6.4 m) lift height
- ✓ 800 lb (360 kg) lifting capacity
- ✓ Adjustable and reversible forks
- ✓ Lifting bar for hoisting lift

EVENTER 25 (Part # 783800)

- ✓ 25' (7.8 m) lift height
- ✓ 650 lb (300 kg) lifting capacity
- ✓ Adjustable and reversible forks
- ✓ Lifting bar for hoisting lift

Great for outdoor venues:

- Concerts
- Location filming
- Rallies
- Pageants



All Eventers are designed for compact storage

EVENTER Options



Part # 784761
EVENTER 16
Applied Adapter



Part # 784880
EVENTER 16 Boom
has two settings:
355 lbs (155 kg),
400 lbs (180 kg)



Part # 783766
Hook blocks - Attach
sound array hardware

EVENTER Specifications

	EVENTER 16		EVENTER 20		EVENTER 25	
Height (stowed)	78.0"	198.1 cm	78.0"	198.1 cm	78.0"	198.1 cm
Length (stowed)	30.0"	76.2 cm	27.5"	69.2 cm	27.5"	69.2 cm
Width (stowed)	24.5"	62.2 cm	23.0"	58.4 cm	23.0"	58.4 cm
Length (operating)	62.0"	157.5 cm	77.25"	196.2 cm	77.25"	196.2 cm
Width (operating)	67.0"	170.2 cm	75.0"	190.5 cm	75.0"	190.5 cm
Height (forks up)	16' 11.0"	5.15 m	20' 7.75"	6.2 m	25' 2.75"	7.7 m
Height (forks down)	15' 11.0"	4.85 m	18' 8.5"	5.7 m	23' 3.5"	7.1 m
Height (boom -Eventer 16 only)	16' 16.0"	5.03 m				
Ground Clearance	3.75"	9.5 cm	3.25"	8.3 cm	3.25"	8.3 cm
Load Height (min)	5.75"	14.6 cm	8.5"	21.6 cm	8.5"	21.6 cm
Load Center (min)	12.0"	30.5 cm	13.0"	33.0 cm	13.0"	33.0 cm
Load Capacity (at load center)	500.0 lb	225.0 kg	800.0 lb	360.0 kg	650.0 lb	300.0 kg
Lift Weight	279.0 lb	126.8 kg	469.0 lb	215.0 kg	514.0 lb	235.0 kg
Fork Width (min)	19.0"	48.3 cm	16.0"	40.6 cm	16.0"	40.6 cm
Fork Width (max)	19.0"	48.3 cm	25.0"	63.5 cm	25.0"	63.5 cm
Fork Length	23.5"	59.7 cm	28.0"	71.1 cm	28.0"	71.1 cm
Fork Weight	18.0 lb	8.2 kg	41.0 lb	19.0 kg	41.0 lb	19.0 kg
Boom Weight (Eventer 16 only)	14.0 lb	6.4 kg				
Winch Rotation	8 / foot	24 / m	5.25 / ft	17 / m	5.25 / ft	17 / m



A Southwire Company

Sumner Manufacturing Co., LLC

USA

7514 Alabonson Road
Houston, Texas 77088
phone: 281.999.6900
fax: 281.999.6966

CANADA

75 Saltsman Drive, Unit 5
Cambridge, ON N3H 4R7
phone: 519.653.5300
fax: 519.653.5305

NETHERLANDS

Midden Engweg 21
NL-3882TS Putten
Netherlands
europeansales@sumner.com
phone: +31 (0) 85 489 0284

UNITED KINGDOM

Unit 3 Kempton Road
Keytec 7 Business Park
Pershore, Worcestershire
WR10 2TA, UK
phone: (44) 01386 556278
fax: (44) 01386 556776

For a full range of Welding Tools see our Welding Make-up Tools Catalog.

www.sumner.com