

30"

HIGH VELOCITY FAN



STANDARD YM - YOKE MOUNT

ADDITIONAL MOUNTING OPTIONS:



RM Rack Mount

109 lbs



CW Column-Wall

119 lbs



PS Portable Stroller

135 lbs



PB Pedestal Base

114 lbs

SHIPPING WEIGHTS:

SIZE	CFM	HP	FAN DIMENSIONS			AIR THROW DISTANCE	SHIPPING WEIGHT
			W	D	ID		
30"	12,000	1	37"	22"	30.875"	200'	99 lbs

FEATURES

- Propeller:** 30" Diameter, 2 Blade GalvAlum, 15°
- Fan Inlet/Outlet:** High Impact Polypropylene
- Finger Guards:** OSHA Compliant
- Power Cord (115V Only):** 12' Length (Switch Optional)
- RPM:** 1800*/1200
- Decibels:** 82.2 @ 20' - 85.5 @ 3' (1800)
- Coverage:** 12,000 ft²

Warranty: 2 Years

MOTOR

VOLTAGE	MOTOR AMPS	RUNNING AMPS
115V/208-230V	13.4/6.8-6.7	12.9/6.6-6.5
208-230/460V*	3.6-3.5/1.8	3.4-3.3/1.7
277V	5.6	5.4


Enclosure: TEAO Standard

Frame: 56

Ambient Temperature: 104°F

Duty Cycle: Continuous

*standard

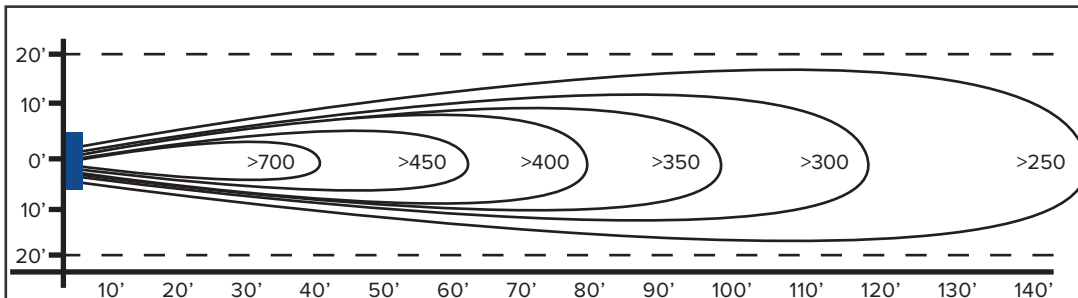

AIR FLOW PATTERN

Above velocities shown in feet/minute.