


## H-Series Heavy Duty Floor Mounted Jib Crane ½ Ton Capacity 10 to 14 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.	
1,000	H1108*	10'	8'	8"	5 1/4"	36"*	949	
1,000	H11010*	10'	10'	8"	5 1/4"	36"*	991	
1,000	H11012*	10'	12'	8"	5 1/4"	36"*	1,033	
1,000	H11014	10'	14'	8"	5 1/4"	36"	1,138	
1,000	H11016	10'	16'	12"	6 ½"	36"	1,598	
1,000	H11018	10'	18'	12"	6 ½"	36"	1,658	
1,000	H11020	10'	20'	12"	6 ½"	36"	1,981	
1,000	H1128*	12'	8'	8"	5 1/4"	36"*	1,005	
1,000	H11210*	12'	10'	8"	5 1/4"	36"*	1,047	
1,000	H11212*	12'	12'	8"	5 1/4"	36"*	1,089	
1,000	H11214	12'	14'	8"	5 1/4"	36"	1,194	
1,000	H11216	12'	16'	12"	6 ½"	36"	1,697	
1,000	H11218	12'	18'	12"	6 ½"	36"	1,757	
1,000	H11220	12'	20'	12"	6 ½"	36"	2,090	
1,000	H1148*	14'	8'	8"	5 1/4"	36"*	1,061	
1,000	H11410*	14'	10'	8"	5 1/4"	36"*	1,103	
1,000	H11412*	14'	12'	8"	5 1/4"	36"*	1,145	
1,000	H11414	14'	14'	8"	5 1/4"	36"	1,570	
1,000	H11416	14'	16'	12"	6 ½"	36"	1,797	
1,000	H11418	14'	18'	12"	6 ½"	36"	1,931	
1,000	H11420	14'	20'	12"	6 ½"	36"	2,199	

**Contact sales for HUBs greater than 14ft. and spans longer than 20 ft.**

**NOTE:**

- Units with (\*) require 3' deep x 4' square foundations. All others require 3' deep x 5' square concrete foundations with rebar.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center..
- All units have 36" base diameter and 32" bolt circle 12 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

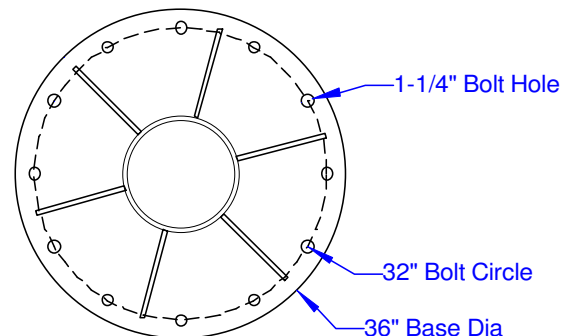

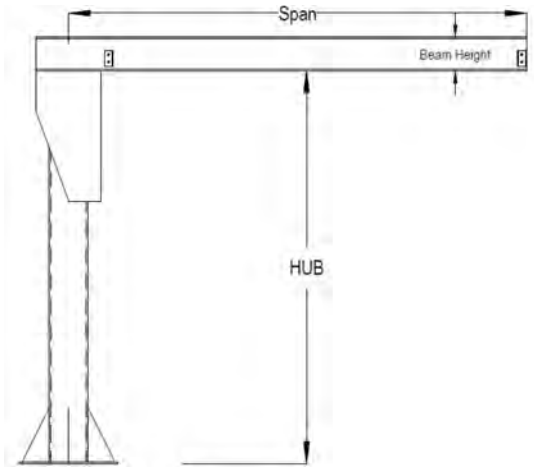



## H-Series Heavy Duty Floor Mounted Jib Crane ½ Ton Capacity 16 to 20 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
1,000	H11610*	16'	10'	8"	5 1/4"	36"*	1,606
1,000	H11612*	16'	12'	8"	5 1/4"	36"*	1,679
1,000	H11614	16'	14'	8"	5 1/4"	36"	1,721
1,000	H11616	16'	16'	12"	6 1/2"	36"	1,980
1,000	H11618	16'	18'	12"	6 1/2"	36"	2,040
1,000	H11620	16'	20'	12"	6 1/2"	48"	2,624
1,000	H11810*	18'	10'	8"	5 1/4"	36"*	1,705
1,000	H11812*	18'	12'	8"	5 1/4"	36"*	1,778
1,000	H11814	18'	14'	12"	6 1/2"	36"	2,029
1,000	H11816	18'	16'	12"	6 1/2"	36"	2,089
1,000	H11818	18'	18'	12"	6 1/2"	48"	2,689
1,000	H11820	18'	20'	12"	6 1/2"	48"	2,749
1,000	H12010*	20'	10'	8"	5 1/4"	36"*	1,804
1,000	H12012*	20'	12'	12"	6 1/2"	36"	2,078
1,000	H12014	20'	14'	12"	6 1/2"	36"	2,138
1,000	H12016	20'	16'	12"	6 1/2"	36"	2,198
1,000	H12018	20'	18'	12"	6 1/2"	48"	2,814
1,000	H12020	20'	20'	12"	6 1/2"	48"	2,874

Contact sales for HUBs greater than 20 ft. and spans longer than 20 ft.

**NOTE:**

- Units with (36"\*) require 3' deep x 4' square foundations. All others require 3' deep x 5' square concrete foundations with rebar.
- Units with 48" diameter base plates have 3' deep by 6' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- All units have 36" base diameter and 32" bolt circle 12 holes 1-1/4" diameter.

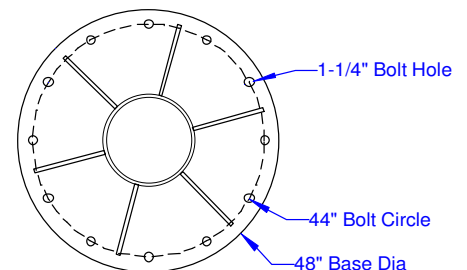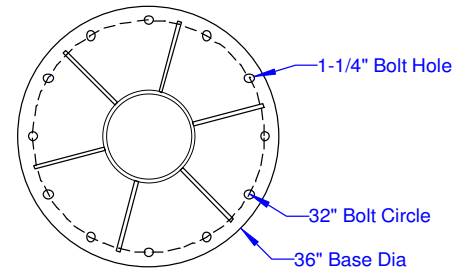

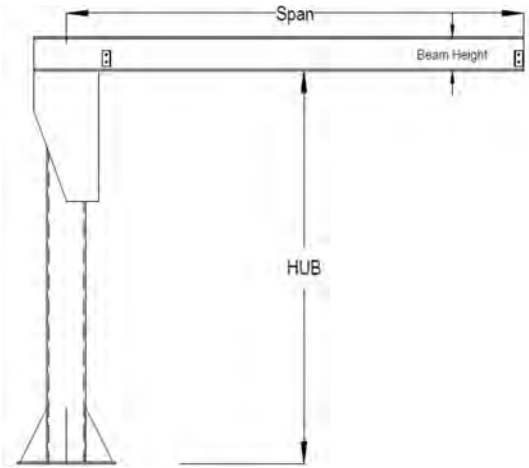



## H-Series Heavy Duty Floor Mounted Jib 1 Ton Capacity 10 to 14 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
2,000	H2108*	10'	8'	8"	5 1/4"	36"*	964
2,000	H21010*	10'	10'	8"	5 1/4"	36"*	1,006
2,000	H21012**	10'	12'	12"	6 1/2"	36"***	1,462
2,000	H21014**	10'	14'	12"	6 1/2"	36"***	1,525
2,000	H21016	10'	16'	12"	6 1/2"	36"	1,652
2,000	H21018	10'	18'	16"	7"	48"	2,239
2,000	H21020	10'	20'	16"	7"	48"	2,453
2,000	H2128*	12'	8'	8"	5 1/4"	36"*	1,005
2,000	H21210*	12'	10'	8"	5 1/4"	36"*	1,047
2,000	H21212**	12'	12'	12"	6 1/2"	36"***	1,564
2,000	H21214**	12'	14'	12"	6 1/2"	36"***	1,702
2,000	H21216	12'	16'	12"	6 1/2"	36"	1,762
2,000	H21218	12'	18'	16"	7"	48"	2,348
2,000	H21220	12'	20'	16"	7"	48"	2,578
2,000	H2148*	14'	8'	8"	5 1/4"	36"*	1,449
2,000	H21410*	14'	10'	8"	5 1/4"	36"*	1,491
2,000	H21412**	14'	12'	12"	6 1/2"	36"***	1,661
2,000	H21414**	14'	14'	12"	6 1/2"	36"***	1,811
2,000	H21416	14'	16'	12"	6 1/2"	36"	1,871
2,000	H21418	14'	18'	16"	7"	48"	2,498
2,000	H21420	14'	20'	16"	7"	48"	2,703

Contact sales for HUBs greater than 14ft. and spans longer than 20 ft.

**NOTE:**

- Units with 36" diameter base plates with (\*) have 4' deep x 5' square foundations, (\*\*) have 4' deep x 6' square foundations and all others have 4' deep by 7' square concrete foundations.
- Units with 48" diameter base plates have 4' deep by 7' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 36" diameter base x 32" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 48" diameter base x 44" bolt circle quantity 12 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

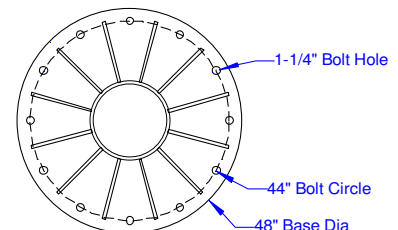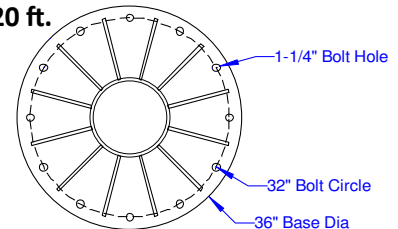

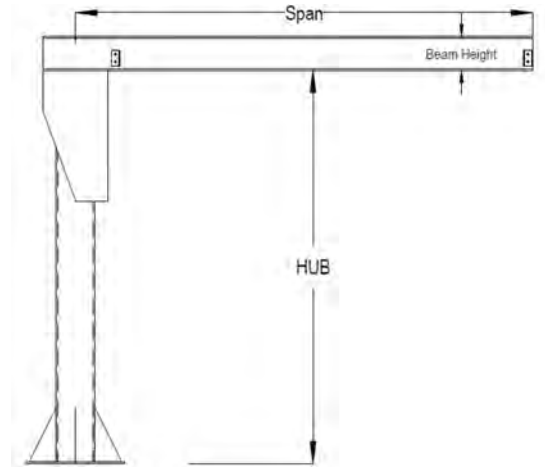



## H-Series Heavy Duty Floor Mounted Jib Crane 1 Ton Capacity 16 to 20 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
2,000	H21610*	16'	10'	8"	5-1/4"	36"*	1,606
2,000	H21612**	16'	12'	12"	6 1/2"	36"*	1,751
2,000	H21614	16'	14'	12"	6 1/2"	48"	2,414
2,000	H21616	16'	16'	16"	7"	48"	2,668
2,000	H21618	16'	18'	16"	7"	48"	2,963
2,000	H21620	16'	20'	16"	7"	48"	3,043
2,000	H21810*	18'	10'	12"	6 1/2"	36"*	1,906
2,000	H21812	18'	12'	12"	6 1/2"	48"	2,494
2,000	H21814	18'	14'	12"	6 1/2"	48"	2,554
2,000	H21816	18'	16'	16"	7"	48"	3,024
2,000	H21818	18'	18'	16"	7"	48"	3,104
2,000	H21820	18'	20'	16"	7"	48"	3,184
2,000	H22010*	20'	10'	12"	6 1/2"	36"*	2,015
2,000	H22012	20'	12'	12"	6 1/2"	48"	2,619
2,000	H22014	20'	14'	16"	7"	48"	2,964
2,000	H22016	20'	16'	16"	7"	48"	3,166
2,000	H22018	20'	18'	16"	7"	48"	3,237
2,000	H22020	20'	20'	16"	7"	48"	3,426

Contact sales for HUBs greater than 20 ft. and spans longer than 20 ft.

**NOTE:**

- Units with 36" diameter base plates with (\*) have 4' deep x 5' square foundations, (\*\*) have 4' deep x 6 ft square foundations and all others have 4' deep by 7' square concrete foundations.
- Units with 48" diameter base plates have 4' deep by 7' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 36" diameter base x 32" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 48" diameter base x 44" bolt circle quantity 12 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

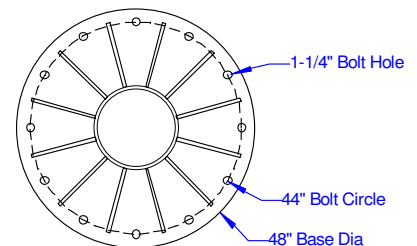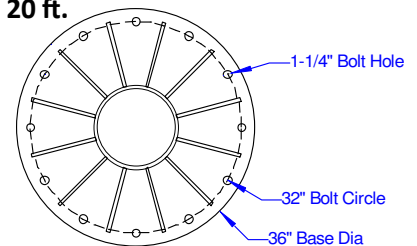

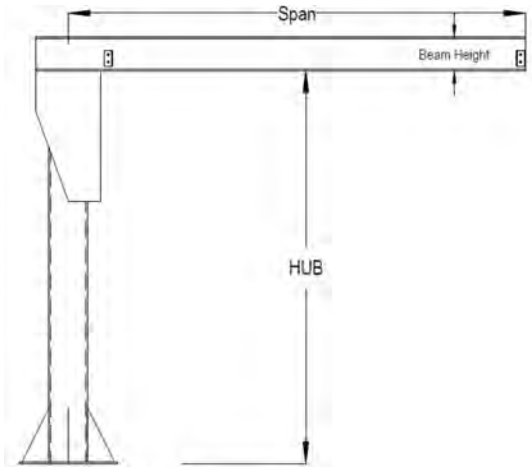



## H-Series Heavy Duty Floor Mounted Jib Crane 2 Ton Capacity 10 to 14 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
4,000	H4108	10'	8'	12"	6 1/2"	36"	1,412
4,000	H41010	10'	10'	12"	6 1/2"	36"	1,472
4,000	H41012*	10'	12'	16"	7"	48"*	2,153
4,000	H41014*	10'	14'	16"	7"	48"*	2,233
4,000	H41016	10'	16'	21"	6 1/2"	48"	2,732
4,000	H41018	10'	18'	24"	7"	48"	3,383
4,000	H41020	10'	20'	24"	7"	48"	3,507
4,000	H4128	12'	8'	12"	6 1/2"	36"	1,522
4,000	H41210	12'	10'	12"	6 1/2"	36"	1,582
4,000	H41212*	12'	12'	16"	7"	48"*	2,278
4,000	H41214*	12'	14'	16"	7"	48"*	2,358
4,000	H41216	12'	16'	21"	6 1/2"	48"	2,857
4,000	H41218	12'	18'	24"	7"	48"	3,525
4,000	H41220	12'	20'	24"	7"	48"	3,649
4,000	H4148	14'	8'	12"	6 1/2"	36"	1,631
4,000	H41410	14'	10'	12"	6 1/2"	36"	1,691
4,000	H41412*	14'	12'	16"	7"	48"*	2,403
4,000	H41414*	14'	14'	16"	7"	48"*	2,483
4,000	H41416	14'	16'	21"	6 1/2"	48"	3,087
4,000	H41418	14'	18'	24"	7"	48"	3,666
4,000	H41420	14'	20'	24"	7"	48"	4,438

Contact sales for HUBs greater than 14ft. and spans longer than 20 ft.

**NOTE:**

- Units with 36" diameter base plates have 4' deep by 6' square concrete foundations.
- Units with 48" diameter base plates that with (\*) have 4' deep x 7' square foundations. All others have 4' deep by 8' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 36" diameter base x 32" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 48" diameter base x 44" bolt circle quantity 12 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

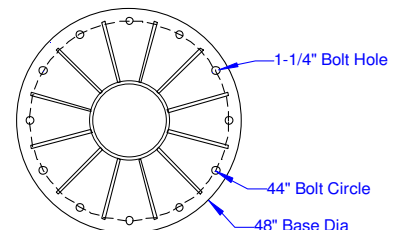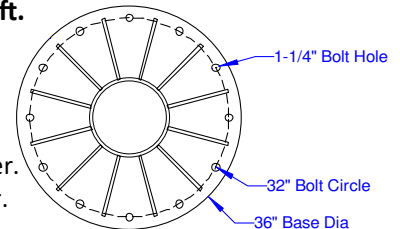

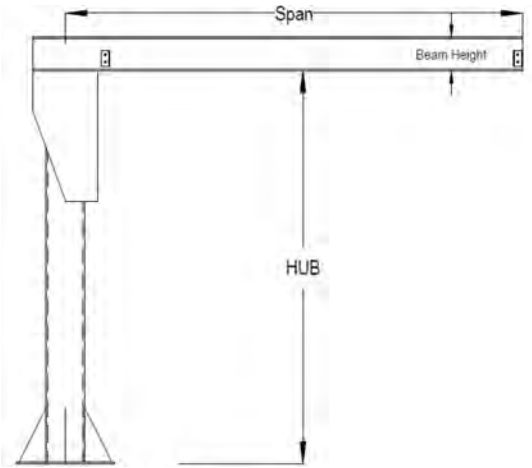



## H-Series Heavy Duty Floor Mounted Jib Crane 2 Ton Capacity 16 to 20 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
4,000	H41610	16'	10'	12"	6 1/2"	36"	1,800
4,000	H41612*	16'	12'	16"	7"	48"*	2,528
4,000	H41614*	16'	14'	16"	7"	48"*	3,183
4,000	H41616	16'	16'	24"	7"	48"	3,677
4,000	H41618	16'	18'	24"	7"	48"	3,801
4,000	H41620	16'	20'	24"	7"	48"	4,646
4,000	H41810*	18'	10'	12"	6 1/2"	48"*	2,434
4,000	H41812*	18'	12'	16"	7"	48"*	3,296
4,000	H41814*	18'	14'	16"	7"	48"*	3,376
4,000	H41816	18'	16'	24"	7"	48"	4,607
4,000	H41818	18'	18'	24"	7"	48"	4,731
4,000	H41820	18'	20'	24"	7"	54"	5,654
4,000	H42010*	20'	10'	12"	6 1/2"	48"*	2,559
4,000	H42012*	20'	12'	16"	7"	48"*	3,438
4,000	H42014*	20'	14'	16"	7"	48"*	3,518
4,000	H42016	20'	16'	24"	7"	48"	4,815
4,000	H42018	20'	18'	24"	7"	48"	4,939
4,000	H42020	20'	20'	24"	7"	54"	5,905

Contact sales for HUBs greater than 20 ft. and spans longer than 20 ft.

**NOTE:**

- Units with 36" diameter base plates have 4' deep by 6' square concrete foundations.
- Units with 48" diameter base plates that with (\*) have 4' deep x 7' square foundations. All others have 4' deep by 8' square concrete foundations.
- Units with 54" diameter base plates have 4' deep by 9' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 36" diameter base x 32" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 48" diameter base x 44" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 54" diameter base x 50" bolt circle quantity 12 holes 1-1/4" diameter
- All foundations should be checked by a structural engineer.

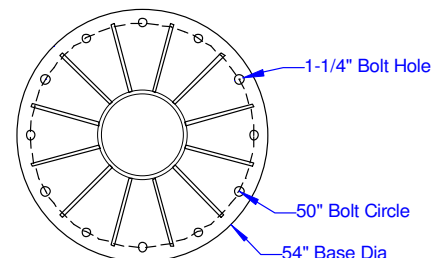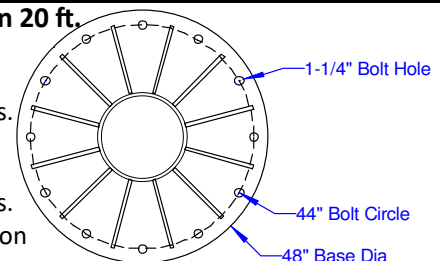

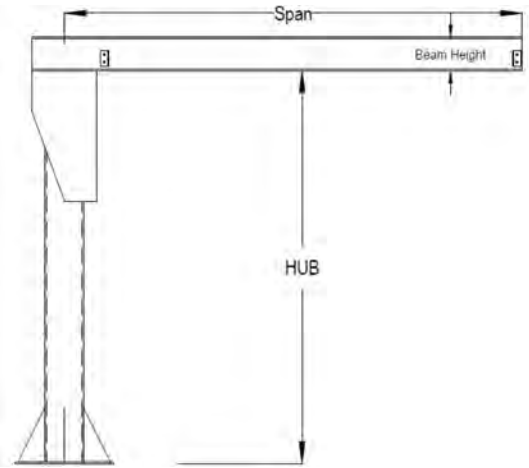



## H-Series Heavy Duty Floor Mounted Jib Crane 3 Ton Capacity 10 to 14 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
6,000	H6108*	10'	8'	16"	7"	48"*	2,021
6,000	H61010*	10'	10'	16"	7"	48"*	2,101
6,000	H61012*	10'	12'	16"	7"	48"*	2,757
6,000	H61014	10'	14'	21"	6 1/2"	48"	3,078
6,000	H61016	10'	16'	24"	7"	48"	3,850
6,000	H61018	10'	18'	24"	9"	54"	4,507
6,000	H61020	10'	20'	24"	9"	54"	5,071
6,000	H6128*	12'	8'	16"	7"	48"*	2,146
6,000	H61210*	12'	10'	16"	7"	48"*	2,226
6,000	H61212*	12'	12'	16"	7"	48"*	2,898
6,000	H61214	12'	14'	21"	6 1/2"	48"	3,219
6,000	H61216	12'	16'	24"	7"	48"	4,059
6,000	H61218	12'	18'	24"	9"	54"	4,715
6,000	H61220	12'	20'	24"	9"	54"	5,322
6,000	H6148*	14'	8'	16"	7"	48"*	2,271
6,000	H61410*	14'	10'	16"	7"	48"*	2,351
6,000	H61412*	14'	12'	16"	7"	48"*	3,039
6,000	H61414	14'	14'	21"	6 1/2"	48"	3,360
6,000	H61416	14'	16'	24"	7"	48"	4,267
6,000	H61418	14'	18'	24"	9"	54"	4,923
6,000	H61420	14'	20'	24"	9"	54"	5,574

Contact sales for HUBs greater than 14ft. and spans longer than 20 ft.

**NOTE:**

- Units with 48" diameter base plates that with (\*) have 4' deep x 7' square foundations and all others have 4' deep by 8' square concrete foundations.
- Units with 54" diameter base plates have 4' deep by 9' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 48" diameter base x 44" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 54" diameter base x 50" bolt circle quantity 12 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

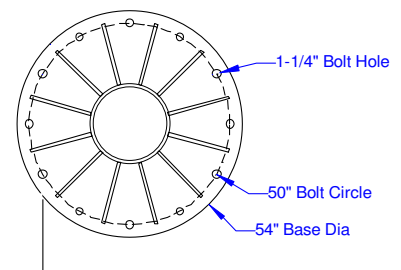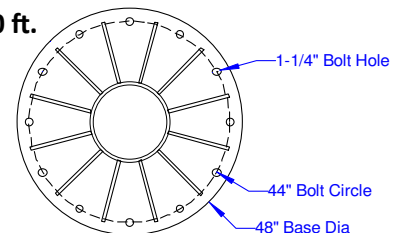

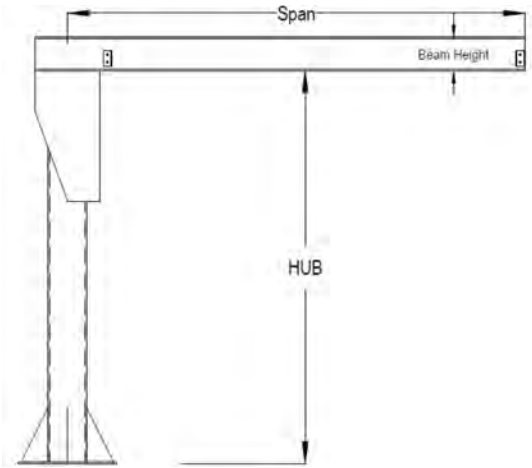



## H-Series Heavy Duty Floor Mounted Jib Crane 3 Ton Capacity 16 to 20 HUB

Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
6,000	H61610*	16'	10'	16"	7"	48"*	2,453
6,000	H61612*	16'	12'	16"	7"	48"*	3,140
6,000	H61614	16'	14'	21"	6 1/2"	48"	3,453
6,000	H61616	16'	16'	24"	7"	48"	4,475
6,000	H61618	16'	18'	24"	9"	54"	5,671
6,000	H61620	16'	20'	24"	9"	54"	5,823
6,000	H61810*	18'	10'	16"	7"	48"*	2,578
6,000	H61812*	18'	12'	16"	7"	48"*	3,281
6,000	H61814	18'	14'	21"	6 1/2"	54"	4,723
6,000	H61816	18'	16'	24"	9"	54"	5,772
6,000	H61818	18'	18'	24"	9"	54"	5,924
6,000	H61820	18'	20'	24"	9"	54"	6,076
6,000	H62010*	20'	10'	16"	7"	48"*	2,703
6,000	H62012	20'	12'	21"	6 1/2"	54"	4,817
6,000	H62014	20'	14'	21"	6 1/2"	54"	4,931
6,000	H62016	20'	16'	24"	9"	54"	6,023
6,000	H62018	20'	18'	24"	9"	54"	6,175
6,000	H62020	20'	20'	24"	9"	54"	6,327


Contact sales for HUBs greater than 14ft. and spans longer than 20 ft.

**NOTE:**

- Units with 48" diameter base plates that with (\*) have 4' deep x 7' square foundations and all others have 4' deep by 8' square concrete foundations.
- Units with 54" diameter base plates have 4' deep by 9' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 48" diameter base x 44" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 54" diameter base x 50" bolt circle quantity 12 holes 1-1/4" diameter.
- All foundations should be checked by a structural engineer.

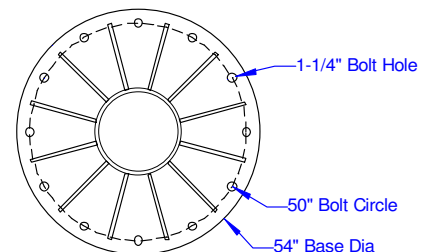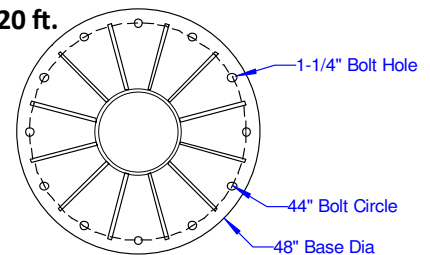



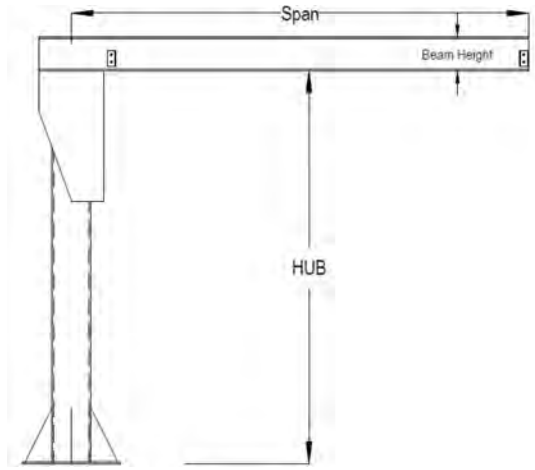


## H-Series Heavy Duty Floor Mounted Jib Crane 5 Ton Capacity 10 to 14 HUB


Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
10,000	H10108	10'	8'	21"	8 ¼"	60"	3,905
10,000	H101010	10'	10'	21"	8 ¼"	60"	4,041
10,000	H101012	10'	12'	21"	8 ¼"	66"	4,791
10,000	H101014	10'	14'	24"	9"	66"	5,069
10,000	H101016	10'	16'	24"	9"	66"	5,221
10,000	H101018	10'	18'	24"	9"	72"	6,203
10,000	H101020	10'	20'	24"	9"	72"	6,962
10,000	H10128	12'	8'	21"	8 ¼"	60"	4,113
10,000	H101210	12'	10'	21"	8 ¼"	60"	4,249
10,000	H101212	12'	12'	21"	8 ¼"	66"	5,047
10,000	H101214	12'	14'	24"	9"	66"	5,320
10,000	H101216	12'	16'	24"	9"	66"	5,472
10,000	H101218	12'	18'	24"	9"	72"	6,518
10,000	H101220	12'	20'	24"	9"	72"	7,277
10,000	H10148	14'	8'	21"	8 ¼"	60"	4,313
10,000	H101410	14'	10'	21"	8 ¼"	60"	4,449
10,000	H101412	14'	12'	21"	8 ¼"	66"	5,757
10,000	H101414	14'	14'	24"	9"	66"	6,036
10,000	H101416	14'	16'	24"	9"	66"	6,188
10,000	H101418	14'	18'	24"	9"	72"	6,833
10,000	H101420	14'	20'	24"	9"	72"	7,593

Contact sales for HUBs greater than 14ft. and spans longer than 20 ft.

**NOTE:**

- Units with 60" & 66" diameter base plates have 4' deep by 9' square concrete foundations.
- Units with 72" diameter base plates have 4' deep by 10' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 60" diameter base x 56" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 66" diameter base x 60" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 72" diameter base x 66" bolt circle quantity 12 holes 1-1/4" diameter.

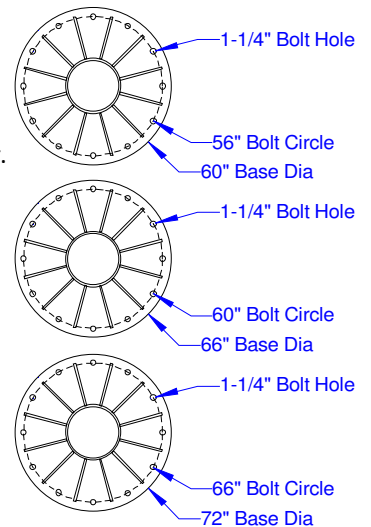

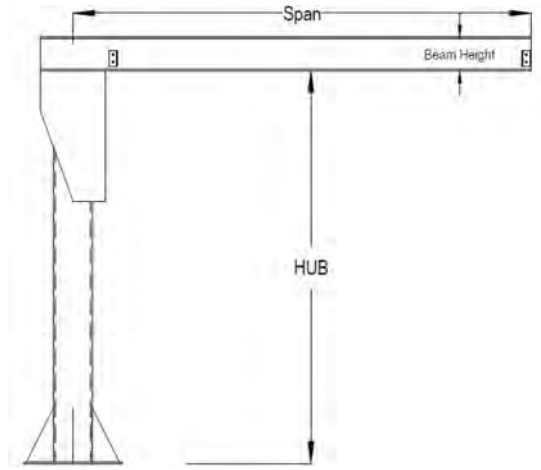


## H-Series Heavy Duty Floor Mounted Jib Crane 5 Ton Capacity 16 to 20 HUB

Capacity (Pounds)	Model	Hub	Span	Beam Height	Flange Width	Base Diameter	Weight lbs.
10,000	H101610	16'	10'	21"	8 ¼"	60"	5,078
10,000	H101612	16'	12'	21"	8 ¼"	66"	5,987
10,000	H101614	16'	14'	24"	9"	66"	6,352
10,000	H101616*	16'	16'	24"	9"	66"*	6,504
10,000	H101618	16'	18'	24"	9"	72"	7,149
10,000	H101620	16'	20'	24"	9"	72"	7,908
10,000	H101810	18'	10'	21"	8 ¼"	60"	5,325
10,000	H101812	18'	12'	21"	8 ¼"	66"	6,394
10,000	H101814	18'	14'	24"	9"	66"	6,667
10,000	H101816*	18'	16'	24"	9"	66"*	6,819
10,000	H101818	18'	18'	24"	9"	72"	7,464
10,000	H101820	18'	20'	24"	9"	72"	8,223
10,000	H102010	20'	10'	21"	8 ¼"	60"	5,576
10,000	H102012	20'	12'	21"	8 ¼"	66"	6,710
10,000	H102014	20'	14'	24"	9"	66"	6,982
10,000	H102016*	20'	16'	24"	9"	66"*	7,134
10,000	H102018	20'	18'	24"	9"	72"	7,779
10,000	H102020	20'	20'	24"	9"	72"	8,539

Contact sales for HUBs greater than 20 ft.

**NOTE:**

- Units with 60" & 66" diameter base plates that have an (\*) have 4' deep x 10' square foundations. All others have 4' deep by 9' square concrete foundations.
- Units with 72" diameter base plates have 4' deep by 10' square concrete foundations.
- 3,000 psi of compressive force-reinforced rebar 3/4" diameter top and bottom 12" on center.
- Base plate dimension: 60" diameter base x 56" bolt circle quantity 12 holes 1-1/4" diameter.
- Base plate dimension: 66" diameter base x 60" bolt circle quantity 12 holes 1-1/4" diameter.

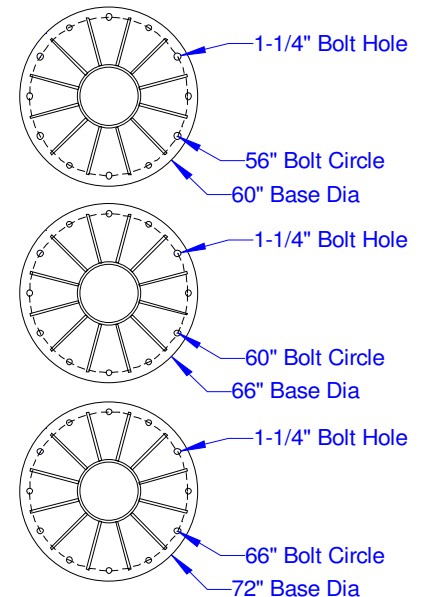



## Jib Crane Accessories for H-Series Units

### Anchor Bolt Kits

- |           |   |
|-----------|---|
| TA1-31-12 | J-Bolt 1" Diameter Bolt 31" long (use only on 1/2 ton jibs) |
| TA1-40-12 | J-Bolt 1" Diameter Bolt 40" long                            |
- Each bolt includes one washer and two nuts.

### Bolt Pattern Template

- |                |                  |
|----------------|------------------|
| 36D12 to 48D12 | Plywood Template |
| 54D12 to 72D12 | Plywood Template |

### Rotation Stops

- |      |   |
|------|---|
| RS   | Field Mounted—Weld-On   |
| RS-B | Field Mounted—Bolt-On (field drill & tap column locations)      |
| RS-C | Adjustable Collar Style (2) collars rotate to desired locations |

### Festooning

- |           |  |
|-----------|--|
| TG        | Tagline Kit with S-Hooks                                   |
| CT        | Steel Cable Trolley— add to TG (1 per every 5 ft. of span) |
| ALC-HT-2  | Plastic 2-wheel trolley - SO Cord / Hose .67 to 0.98 OD    |
| ALC-FWT-2 | Plastic 2-wheel trolley—4-wire Flat Wire Cable             |



CT



ALC-HT-2



ALC-FWT-2

### Collector Rings

- |     |  |
|-----|--|
| TEC | Top Entry Collector Ring and Mounting Plate  |
| BEC | Bottom Entry Collector Ring<br>—BEC requires minimum 12" beam. Includes crane preparation. |
| TAS | Top Entry Air Swivel   |