



**QS** Products eligible for Quick Ship display a QS icon.



## HALB ADJUSTABLE LIFTING BEAM

### FEATURES

- This style of lifting beam can lift off center loads easily by adjusting the bail prior to the lift.
- This lifter can be used where headroom is limited, & comes with multiple spreads that are adjustable to accommodate various load sizes at 6" adjustable increments.
- Supplied with two lower shackles.
- Engineered and manufactured to ASME B30.20 & BTH-1 Design Category B Service Class 2.
- 100% of ALL Harrington Lifting Beams are proof-tested to 125% capacity and certificates supplied at no additional charge.
- Made in USA.

### OPTIONS

- Swivel hooks

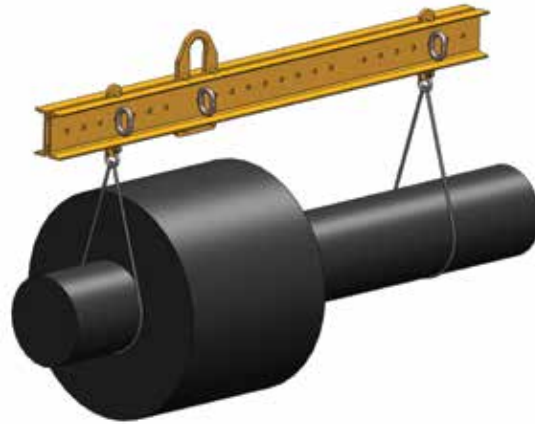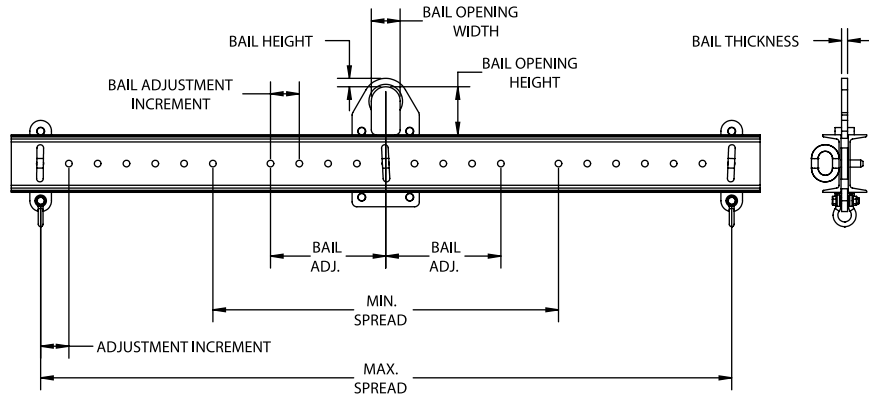

Model #	Capacity (US Tons)*	Max. Spread (Ft.)	Min. Spread (Ft.)	Dimensions (Inches)								Weight (Lbs.)
				Head-room	Bail Height	Bail Opening Width	Bail Opening Height	Bail Thickness	Bail Adjustment Increments	Bail Travel (Half of Center)	Shackle Size (Tons)	
<b>QS</b> HALB-1.25-6	1.25	6	3	13.5	1	3	5	0.63	3	12	2	120
<b>QS</b> HALB-2-6	2	6	3	14.5	1	3	5	0.63	3	12	2	140
<b>QS</b> HALB-4-8	4	8	4.5	20	1.5	4	7	0.75	6	18	3.25	315
<b>QS</b> HALB-5-10	5	10	5	22	1.5	4	7	1	6	18	4.75	440

\* 1 US Ton = 2,000 Lbs



**DO NOT EXCEED CAPACITY!**  
See the SAFETY GUIDELINES section before using these products. Pages 88–90.